

**Server API** ..... 1

..... 1


OnUserPhrase ..... 2

OnBarcodeScanned ..... 2

OnOsdpStandardDeviceStatusChanged ..... 2

# Server API

, BioStar

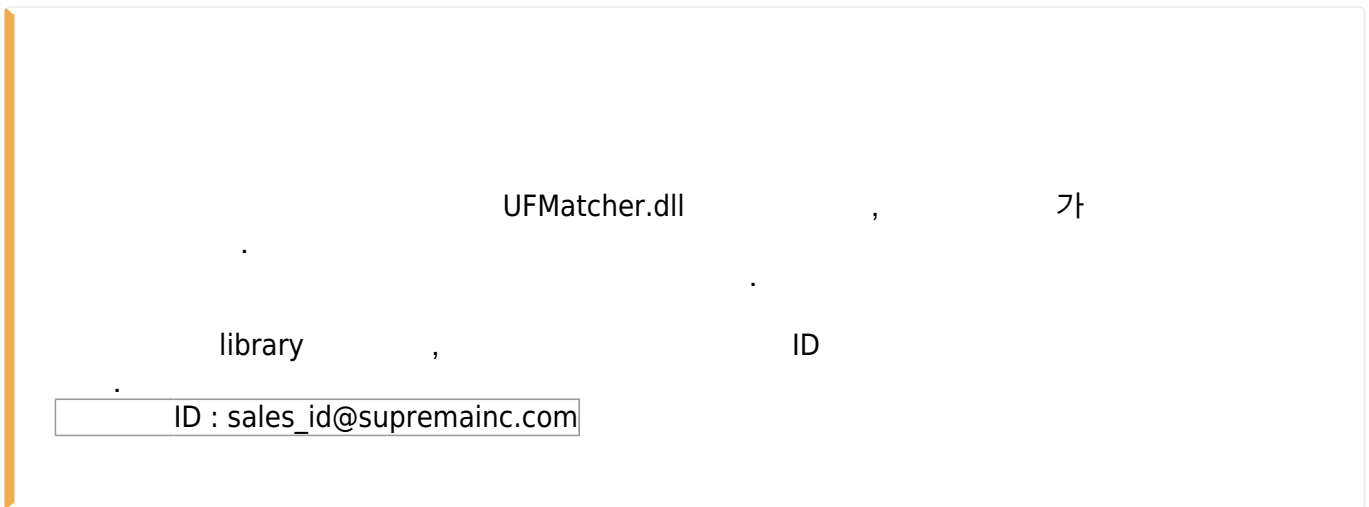

- [BS2\\_SetServerMatchingHandler](#):
- [BS2\\_VerifyUser](#): User ID
- [BS2\\_IdentifyUser](#):
- [BS2\\_VerifyUserEx](#): [+ 2.4.0] User ID
- [BS2\\_IdentifyUserEx](#): [+ 2.4.0]
- [BS2\\_VerifyUserSmall](#): [+ 2.6.3] User ID
- [BS2\\_IdentifyUserSmall](#): [+ 2.6.3]
- [BS2\\_VerifyUserSmallEx](#): [+ 2.6.3] User ID
- [BS2\\_IdentifyUserSmallEx](#): [+ 2.6.3]
- [BS2\\_VerifyUserFaceEx](#): [+ 2.7.2] User ID
- [BS2\\_SetUserPhraseHandler](#): [+ 2.7.0]
- [BS2\\_ResponseUserPhrase](#): [+ 2.7.0]
- [BS2\\_SetBarcodeScanListener](#): [+2.8.2] Barcode listener
- [BS2\\_SetOsdpStandardDeviceStatusListener](#): [+ 2.9.1] OSDP listener

```
typedef void (*OnVerifyUser)(uint32_t deviceId, uint16_t seq, uint8_t
isCard, uint8_t cardType, const uint8_t* data, uint32_t dataLen);
typedef void (*OnIdentifyUser)(uint32_t deviceId, uint16_t seq, uint8_t
format, const uint8_t* templateData, uint32_t templateSize);
```

## 1. OnVerifyUser

Card , User ID가 BioStar

## 2. OnIdentifyUser

BioStar

### OnUserPhrase

```
typedef void (*OnUserPhrase)(uint32_t deviceId, uint16_t seq, const char*
userID);
```

1. *deviceId*

2. *seq*

3. *userID*  
ID

### OnBarcodeScanned

barcode가 scan

```
typedef void (*OnBarcodeScanned)(uint32_t deviceId, const char* barcode);
```

1. *deviceId*  
barcode ID

2. *barcode*  
barcode

### OnOsdpStandardDeviceStatusChanged

OSDP 가

```
typedef void (*OnOsdpStandardDeviceStatusChanged)(uint32_t deviceId, const
BS20sdpStandardDeviceNotify* notifyData);
```

1. *deviceId*  
OSDP

## 2. notifyData

OSDP

From:

<https://kb.supremainc.com/bs2sdk/> - **BioStar 2 Device SDK**

Permanent link:

[https://kb.supremainc.com/bs2sdk./doku.php?id=ko:server\\_api&rev=1676354236](https://kb.supremainc.com/bs2sdk./doku.php?id=ko:server_api&rev=1676354236)

Last update: **2023/02/14 14:57**