

Table of Contents

How to issue smart cards	1
Configure a smart card format	1
Applying the configured smart card format to the devices	4
Formatting a card	4
Issuing a smart card	5

[System Configuration](#), [BioStar 2](#), [Smart](#), [Card](#)

How to issue smart cards

The BioStar 2 system is designed to authenticate users matching the template stored inside the device with the scanned fingerprint template. However, there are needs for securing personal information including fingerprint templates. In BioStar 2, the administrator can use a concept called smart card which will allow to issue cards to store users' fingerprint templates inside a card and carry it for the authentication. This will lead to a more secure environment since the devices doesn't have to store the user information inside the device.

To issue a smart card, such as Access on Card and Secure Credential card, you will have to configure the smart card format first, and apply it to the device.

Access on Card doesn't need any user information transferred to the device. Secure Credential Card needs basic user information stored inside the device.
Secure Credential Card is used when only to store the fingerprint template inside the card.

To understand the benefits and difference between the two smart cards, refer to the following [FAQ](#)

Configure a smart card format

1) Go to **Setting** → **Card Format** → **Add Smart Card**.

3) You can select to use up to 2 card keys for the card. To use the Secondary Key, you will have to activate it first. Check the checkbox if you need to use the key.

If you're trying to write a key to a blank card without a key, configure the primary key and turn on the secondary key but leave the secondary key blank.

The screenshot shows the 'Information' section of a configuration tool. At the top, the 'Name' is 'Mifare Layout' and the 'Secondary Key' toggle is turned on to 'Active'. Below this are tabs for 'MIFARE', 'iCLASS', 'DESFire / Mobile', and 'iCLASS Seos'. The 'MIFARE' tab is selected. Under 'Primary Key', there are two empty text boxes. Under 'Secondary Key', there is a checked checkbox, a text box containing 'New Secondary Key', and a 'Confirm New Secondary Key' button. At the bottom, the 'Start Block Index' is set to 4. On the right side, there is a red warning message: 'The key values made with 2.5v or before need to be converted to HEX through the below before applying.' Below this is a 'Convert to HEX' button and a 'Converting Result:' label.

This screenshot shows the 'Information' section with the 'Name' set to 'Test' and the 'Secondary Key' toggle set to 'Active'. The 'MIFARE' tab is selected. The 'Primary Key' section has two text boxes, each containing four asterisks. The 'Secondary Key' section has a checked checkbox and two text boxes, each containing six asterisks. The 'Start Block Index' is set to 4.


4) You can configure how many templates you want to store inside the card and which block to start on storing the information. You can also configure the template size, if you don't have enough space on the card to fit the template.

The screenshot shows the 'Start Block Index' set to 8. Below it is the 'Layout' section with 'Template Count' set to 2 and 'Template Size' set to 300.

Applying the configured smart card format to the devices

To make the device read the smart cards, you will have to set the device to have the smart card format.


- 1) Go to **Device** → **Select the device** → **Authentication Tab** → **Card ID Format**.
- 2) You will find the smart card format layout menu. Select the layout that you want to apply.

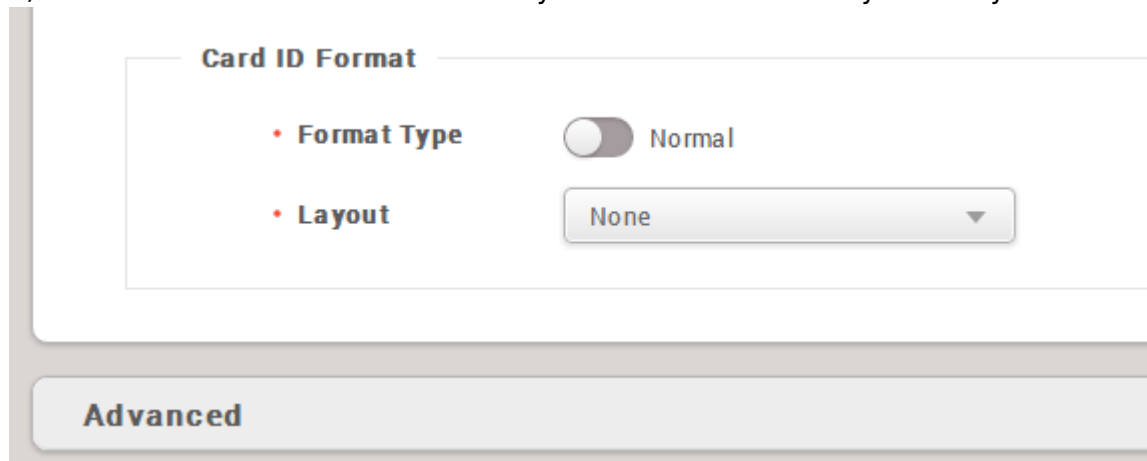

Formatting a card

The card needs to be formatted before being used as a smart card. The card information stored in the blocks will be deleted.

- 1) Go to **User** → **Select a user** → **+ Card**.

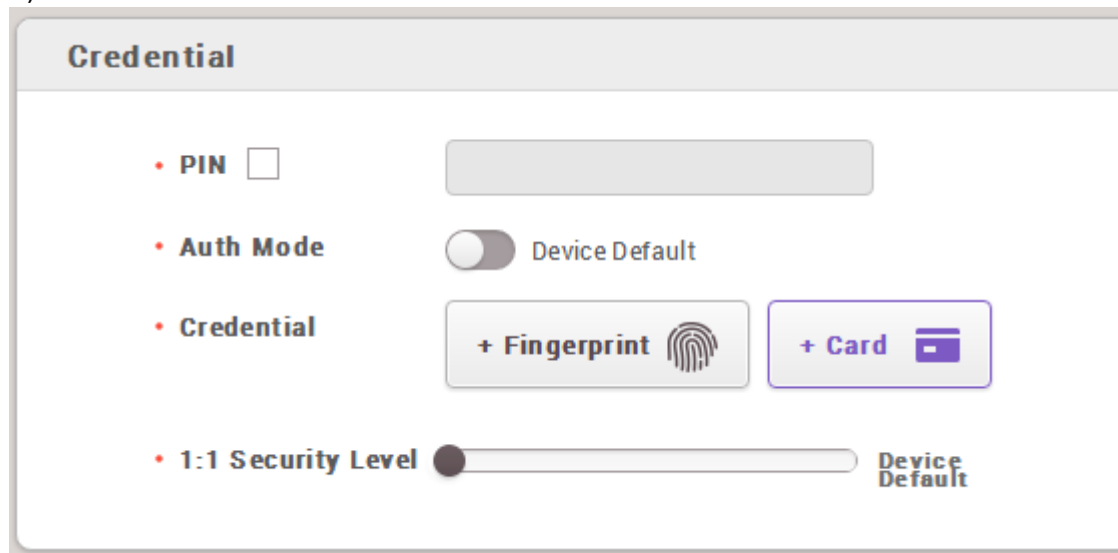

- 2) Select **Read Card** from the **Card Type** menu.

Enroll Card✕

• **Card Type**

• **Card Layout Format**

• **Device**

• **Smart Card Type**

Information

• **Card ID**


• **Access Group**

• **Fingerprint**

• **PIN**


• **Period**

1st Finger



Duress

2st Finger



Duress

Format Card

Read Card

Cancel

- 3) Select the device to format the card.
- 4) Click **Format Card** and place the card on the device. If the format is successful done, you will hear a sound from the device.

Issuing a smart card

- 1) From the same screen, please change the **Card Type** to **Enroll Smart Card**.

Enroll Card✕

• **Card Type** Enroll Smart Card ▼

• **Card Layout Format**

• **Device** None ▼

• **Smart Card Type** Secure Credential Card ▼

Information


• **Card ID** 2

• **PIN**

• **Fingerprint**

1st

1st Finger

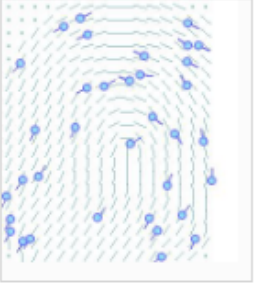

Duress

Write Smart Card Cancel

- 2) Select the device to enroll the smart card.
- 3) Select the smart card type. Access on Card and Secure Credential Card is supported.
 - 3-1) The Access on Card will use the user ID same for the secure ID.
 - 3-2) The Secure Credential Card's secure ID can be modified.
- 4) Select the fingerprint template to be written on the card. For example, click the **1st** button to select the 1st template to be written on the card. The template will get highlighted. A fingerprint must be added first to use the template.

- <https://kb.supremainc.com/knowledge/>

Enroll Card✕

• **Card Type**

• **Card Layout Format**

• **Device**

• **Smart Card Type**

Information


• **Card ID**

• **PIN**

• **Fingerprint**

1st

1st Finger

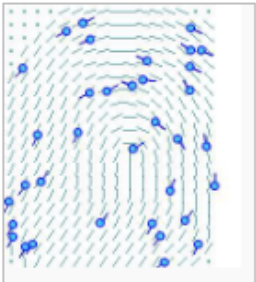

Duress

Write Smart Card

Cancel

5) Click the **Write Smart Card** button.

From:
<https://kb.supremainc.com/knowledge/> -

Permanent link:
https://kb.supremainc.com/knowledge/doku.php?id=en:how_to_issue_a_smart_card&rev=1525308293

Last update: **2018/05/03 09:44**