

Table of Contents


How to keep network settings during factory default 1

[System Configuration](#), [BioStar 2](#), [Network](#), [factory default](#), [restore to default](#), [reset](#)

How to keep network settings during factory default

Before BioStar 2.6, some devices couldn't restore to default value without changing network setting. If you perform **Factory Default** while using static IP instead of DHCP, you must reconfigure network for the device. However, not all sites have someone who can manage the devices. In this case, the installer must visit the site directly.

To resolve such inconvenience, BioStar 2.6 and above versions provide an option 'Without network' for every device

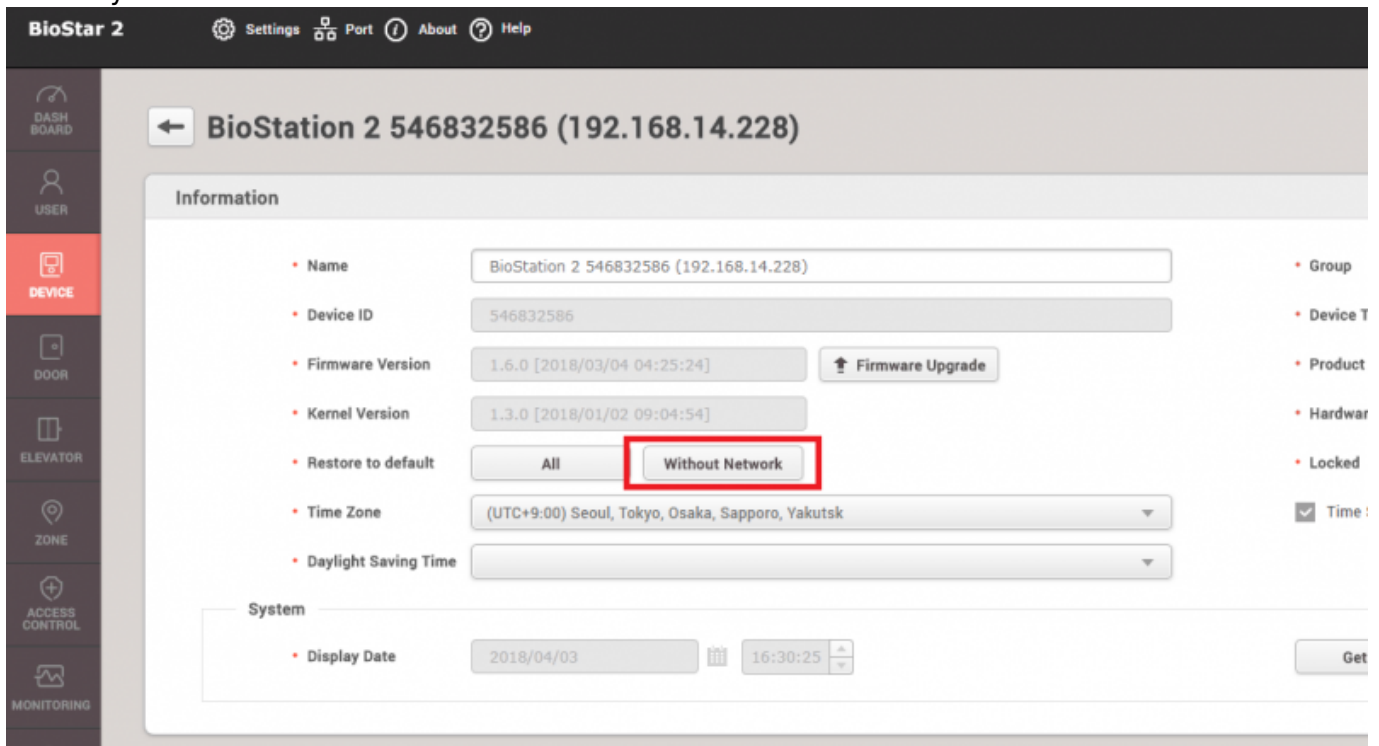

The screenshot shows the BioStar 2 web interface for a device named 'BioStation 2 546832586 (192.168.14.228)'. The 'Information' section includes fields for Name, Device ID, Firmware Version (1.6.0), and Kernel Version (1.3.0). The 'Restore to default' section has two buttons: 'All' and 'Without Network', with the latter highlighted by a red box. Other settings like Time Zone and Daylight Saving Time are also visible. The 'System' section shows the display date and time.

With this option, you can reset your device to **Factory Default** status without changing its network settings.

- This feature is supported from the 2nd generation devices with specific FW versions.

From:

<http://kb.supremainc.com/knowledge/> -

Permanent link:

http://kb.supremainc.com/knowledge/doku.php?id=en:how_to_keep_network_settings_during_factory_default

Last update: **2021/12/17 10:34**