


---

.....	1
.....	1
.....	2

	RF	<ul style="list-style-type: none"> <li>● <b>BS3-DB</b>: 125kHz EM &amp; 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2/EV3<sup>1)</sup>, FeliCa</li> <li>● <b>BS3-APWB</b>: 125kHz EM, HID Prox &amp; 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2/EV3<sup>2)</sup>, FeliCa, iCLASS SE/SR/Seos</li> </ul>
	RF <sup>3)</sup>	EM/HID Prox/MIFARE/DESFire/HID iCLASS: 30 mm, FeliCa: 15 mm
		NFC, BLE
	QR	
	CPU	1.5GHz Quad Core
		32GB Flash + 4GB RAM
	LCD	5.5" IPS LCD
	LCD	720 x 1280
		16bit
		-20°C ~ 50°C
		-40°C ~ 70°C
		0% ~ 80%,
		0% ~ 90%,
		2MP 2EA
	(W x H x D)	82.5 x 171 x 23.4 (mm)
		<ul style="list-style-type: none"> <li>● - <b>BS3-DB</b>: 370 g</li> <li>- <b>BS3-APWB</b>: 380 g</li> <li>● : 90 g ( )</li> </ul>
	IP	IP65
	IK	IK06
		CE, FCC, IC, KC, RoHS, REACH, WEEE, UKCA, RCM
		0.6 ~ 1.0 m
		1.4 ~ 1.9 m
		0.3
		100,000 <sup>4)</sup>
	(1:N)	● : 50,000
		● : 100,000
	(1:1)	● : 100,000
		● PIN: 100,000
		5,000,000
		50,000

		(10/100/1000 Mbps, MDI/MDI-X)
Wi-Fi	● <b>BS3-DB:</b> ● <b>BS3-APWB:</b>	(802.11 b/ g/ n 2.4GHz)
RS-485	1 /	( 가 )
Wiegand	1 , 1	
TTL	3	
	1	
PoE+	● <b>BS3-DB:</b> ● <b>BS3-APWB:</b>	(IEEE 802.3at compliant)
RTSP		
USB		USB 2.0 (Host)
USB		
		DC 12 V ( : 2.5 A) DC 24 V ( : 1.2 A)
	VIH	: 3V / : 5V
	VIL	: 1V
		4.7 kΩ ( 4.7 kΩ .)
Wiegand	VOH	4.8V
Wiegand	VOL	0.2 V
Wiegand		1 kΩ
		2 A @ 30 VDC Resistive load 1 A @ 30 VDC Inductive load

( : mm)

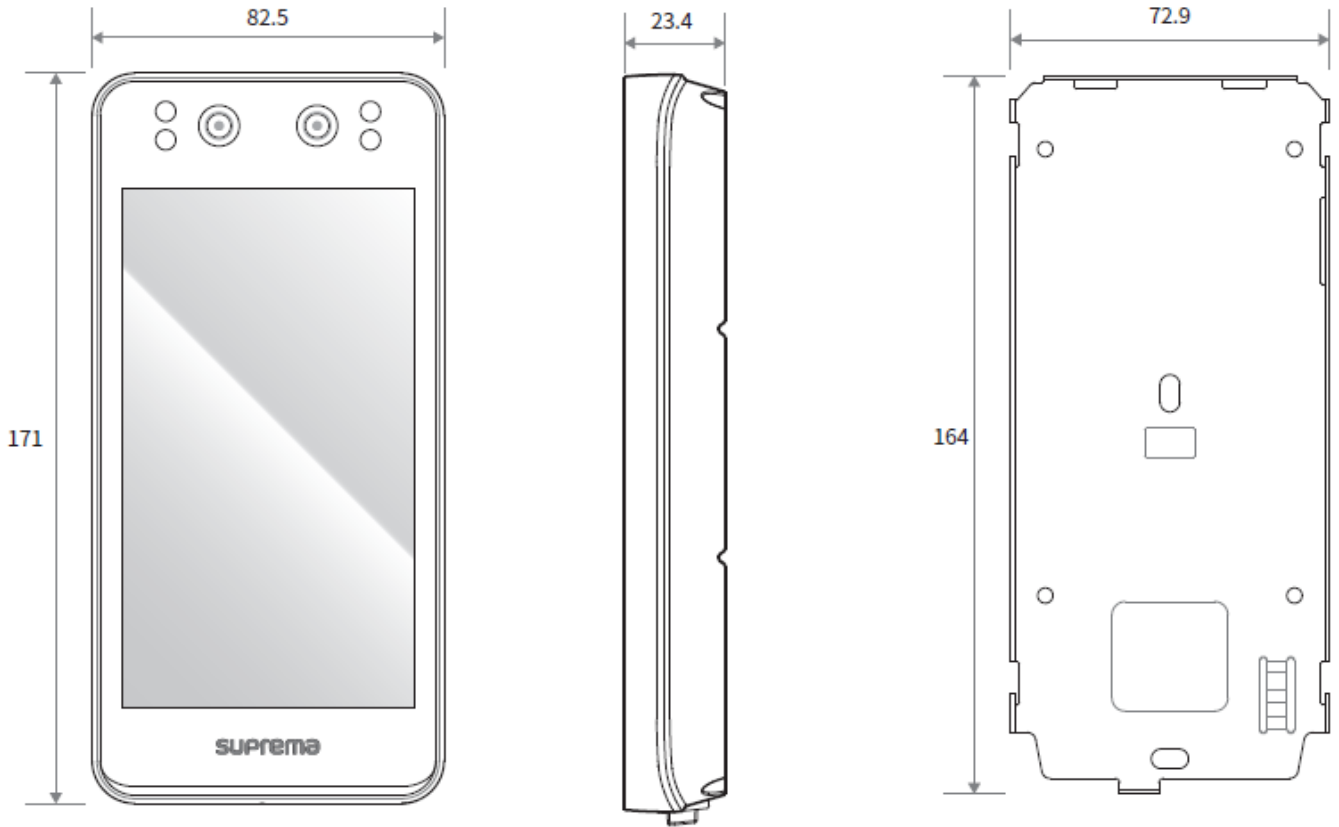

1) 2)

DESFire EV3  
CSN

DESFire EV1/EV2

, DESFire EV1/EV2

3)

RF

4)

From:  
<https://kb.supremainc.com/knowledge/> -

Permanent link:  
[https://kb.supremainc.com/knowledge/doku.php?id=ko:product\\_specification\\_dimensions&rev=1665716168](https://kb.supremainc.com/knowledge/doku.php?id=ko:product_specification_dimensions&rev=1665716168)

Last update: **2022/10/14 11:56**