

Table of Contents

BioStar 2 Server and Device Port Usage	1
Server to Device	1
Server to Device Mode	2
Device to Server Mode	2
Changing the Web Server Port	3
Changing the Server Port	3
Changing the Device Port	4

[BioStar 2](#), [Network](#), [VPN](#), [WAN](#)

BioStar 2 Server and Device Port Usage

BioStar 2 uses several ports to establish device and data communication.

This information is crucial if you are installing the devices on remote networks with WAN or VPN.

If you need more information regarding connection modes please refer to [Connection Modes in BioStar 2](#)

The server port of BioStar 2 is 51212 by default, but it can be configured to another port in **Setting > Server**.

Maria DB uses port 3312


T&A module uses port 3000, 3002

Nginx uses port 9000

To check out the full list of port usage, refer to our [Freshdesk FAQ article](#)

Server to Device


With server to device mode, the device connection is initiated from the BioStar Client and the client makes a connection to the server. This is why you cannot see the device from another client when it's already connected to particular client. In this case, the port number is like the below.

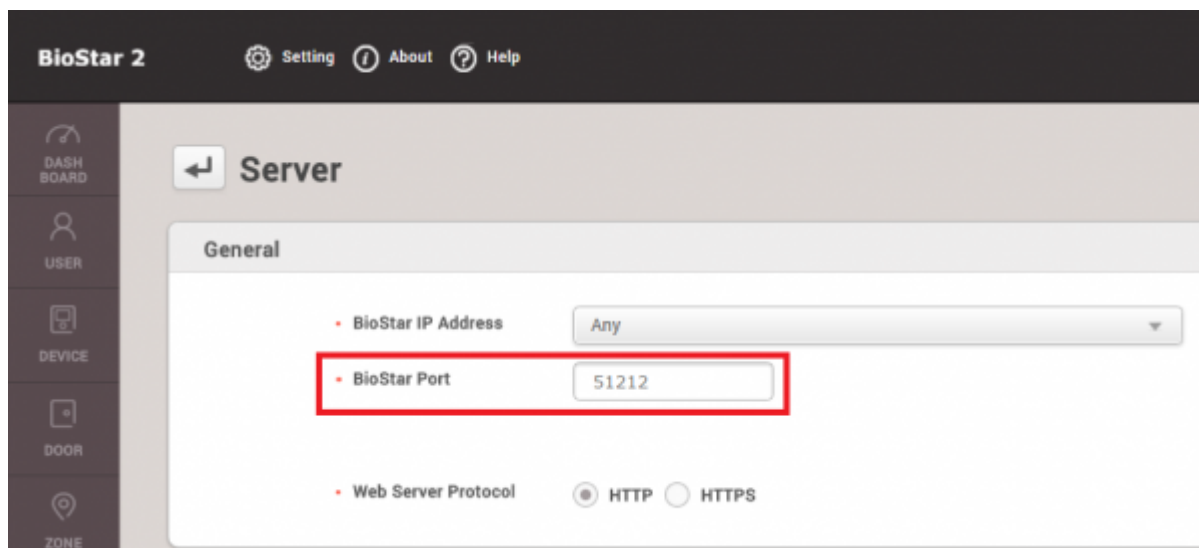


If you are installing devices in a remote network, it is recommended that you use device to server, so that the device will automatically connect to the server if it loses connection.

Refer to the images below to see what ports should be open and forwarded as necessary in your firewall and router.

Server to Device Mode

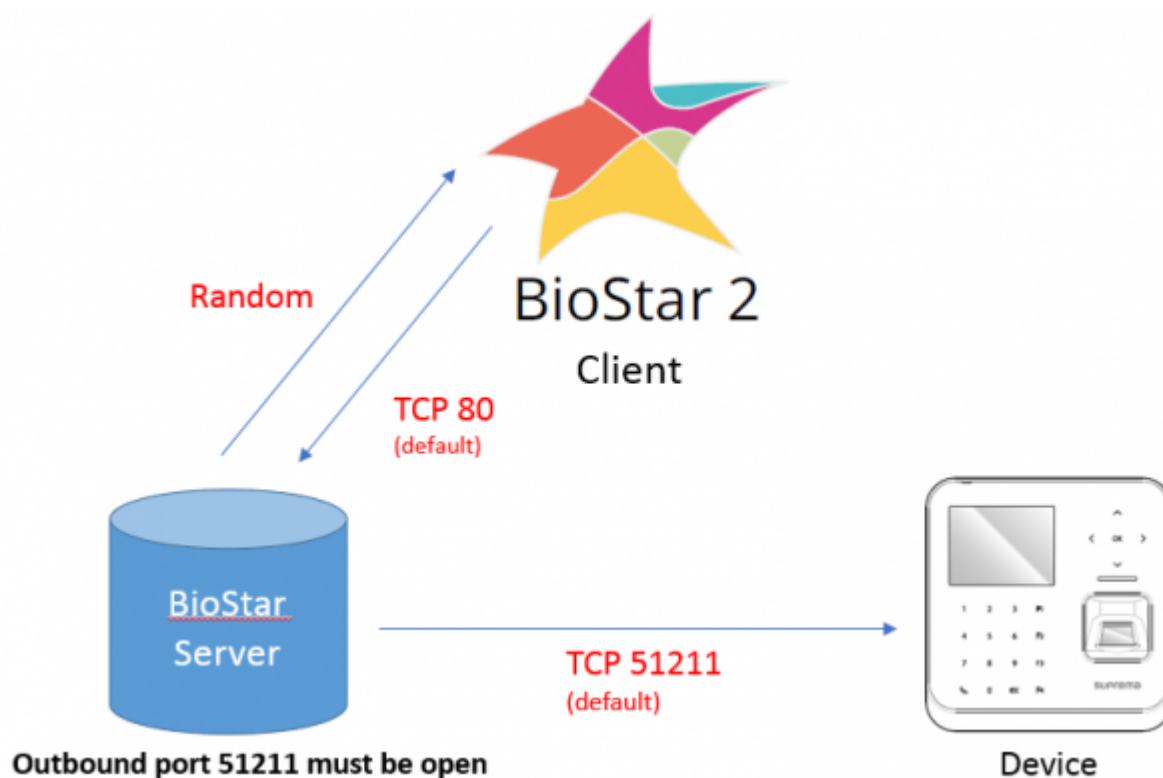

Device to Server Mode

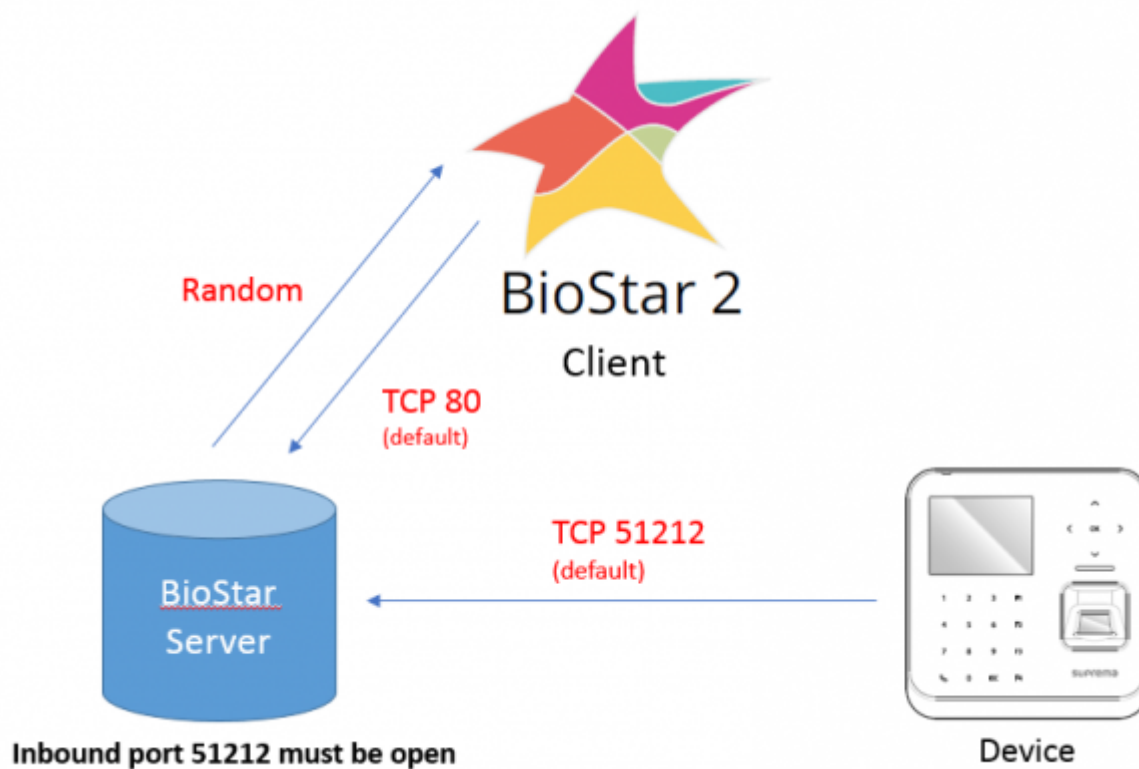


Changing the Web Server Port

The server HTTP port or HTTPS port which is used to communicate with the client can be changed in BioStar Setting.


BioStar Setting is included in the installation of BioStar. You can search for the application in the start menu.

You will have to stop the services to change the port.

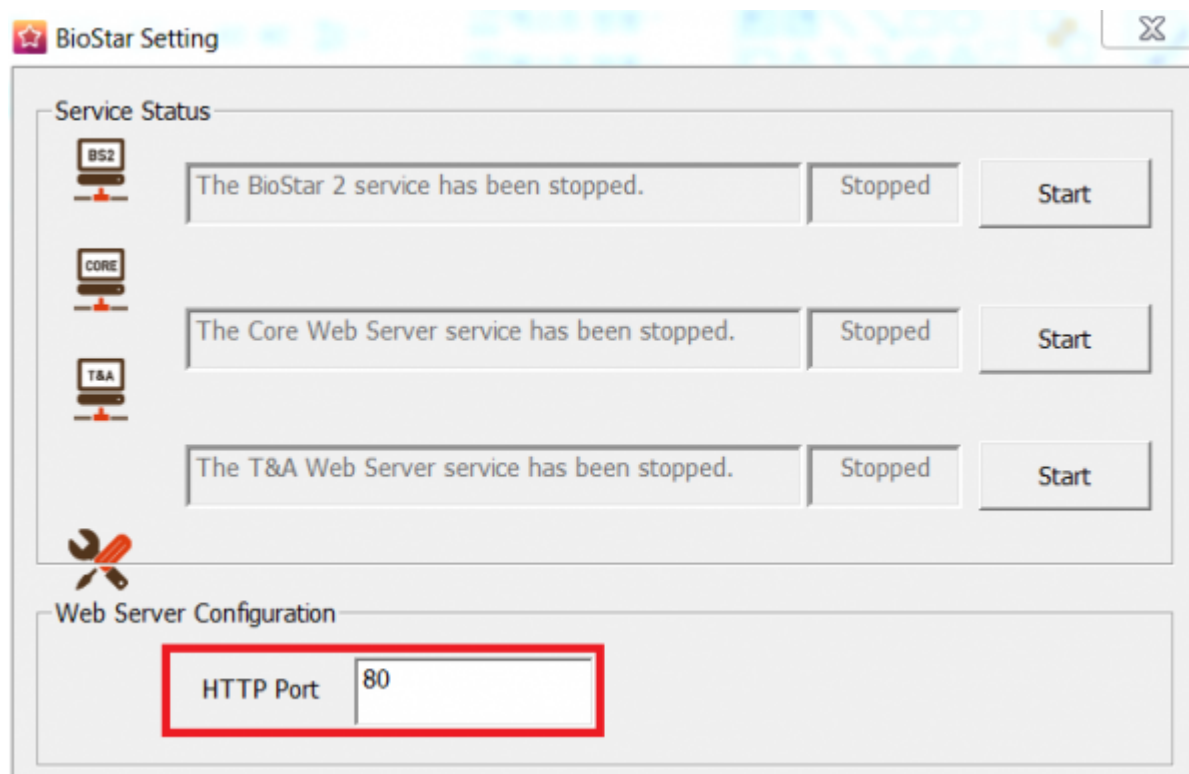

Changing the Server Port

The server port can be changed in **Setting > Server** in BioStar 2's menu.

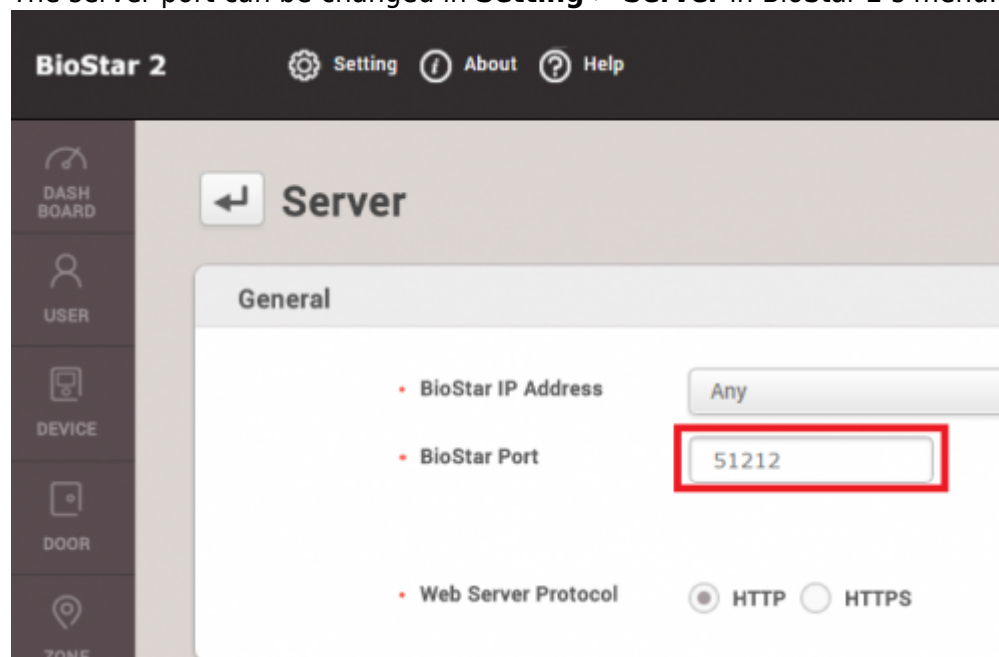

Changing the Device Port

You can change the device port in the device menu after selecting the device. It is found in the network tab.

The screenshot shows the 'Network' configuration page. On the left is a sidebar with icons for 'DEVICE', 'DOOR', 'ZONE', and 'ACCESS CONTROL'. The main area is titled 'Network' and contains a 'TCP/IP' section. In this section, there is a checkbox for 'Use DHCP' which is checked. Below it are fields for 'IP Address' (192.168.14.233), 'Gateway' (192.168.14.1), and 'DNS Server Address' (empty). To the right of these are fields for 'Subnet Mask' (255.255.255.0) and 'Device Port' (51211). The 'Device Port' field is highlighted with a red rectangular border.

Below is a screenshot of BioStation 2's device manual. For device with LCDs, you can set it on the device as well.

The screenshot shows the 'TCP/IP' configuration screen on a device. At the top, there is a 'Type' dropdown menu set to 'Ethernet'. Below it, the 'PORT' is set to 51211, which is highlighted with a red rectangular border. Other settings shown include 'DHCP' (Enabled), 'IP Address' (192.168.16.141), 'Gateway' (192.168.16.1), and 'Subnet Mask' (255.255.255.0).

From:

<http://kb.supremainc.com/knowledge/> -

Permanent link:

http://kb.supremainc.com/knowledge/doku.php?id=en:2xfaq_what_ports_biostar_2_server_device_use

Last update: **2022/08/24 10:14**