

Table of Contents

How to keep network settings during factory default


1

[System Configuration](#), [BioStar 2](#), [Network](#), [factory default](#), [restore to default](#), [reset](#)

How to keep network settings during factory default

Before BioStar 2.6, some devices couldn't restore to default value without changing network setting. If you use Factory Default when you use static IP instead of DHCP, you need to reconfigure network. Every site does not always have a person who can manage the device. In this case, the installer has to visit the site directly.

To resolve this inconvenience, BioStar 2.6 provides an option 'Without network' for every device

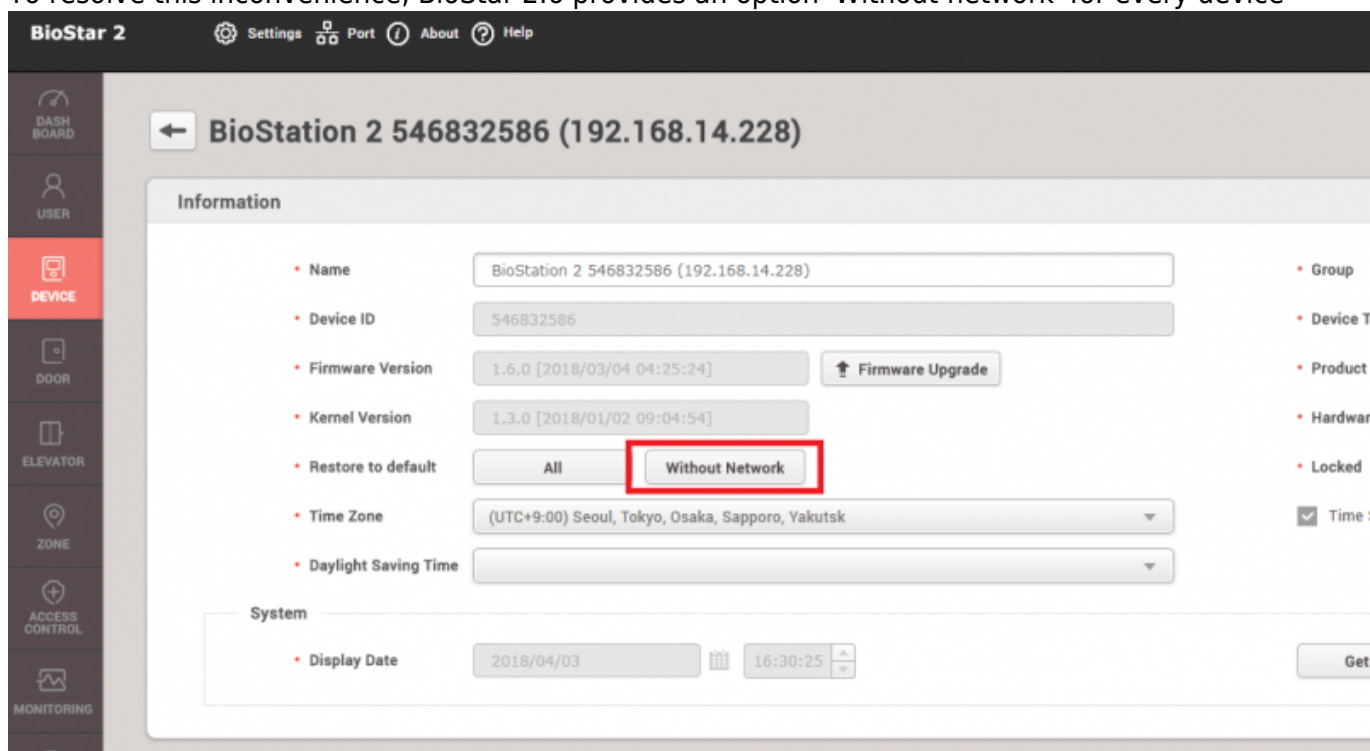

The screenshot shows the BioStar 2 web interface. The top navigation bar includes 'Settings', 'Port', 'About', and 'Help'. The left sidebar has icons for 'DASH BOARD', 'USER', 'DEVICE', 'DOOR', 'ELEVATOR', 'ZONE', 'ACCESS CONTROL', and 'MONITORING'. The main content area is titled 'BioStation 2 546832586 (192.168.14.228)'. Under the 'Information' tab, there are several fields: 'Name' (BioStation 2 546832586 (192.168.14.228)), 'Device ID' (546832586), 'Firmware Version' (1.6.0 [2018/03/04 04:25:24]) with a 'Firmware Upgrade' button, 'Kernel Version' (1.3.0 [2018/01/02 09:04:54]), 'Restore to default' (with 'All' and 'Without Network' buttons, where 'Without Network' is highlighted with a red box), 'Time Zone' (UTC+9:00 Seoul, Tokyo, Osaka, Sapporo, Yakutsk), and 'Daylight Saving Time'. On the right side, there are status indicators for 'Group', 'Device T', 'Product', 'Hardware', 'Locked', and 'Time'. At the bottom, the 'System' section shows 'Display Date' (2018/04/03) and '16:30:25' with a 'Get' button.

From:
<http://kb.supremainc.com/knowledge/> -

Permanent link:
http://kb.supremainc.com/knowledge/doku.php?id=en:how_to_keep_network_settings_during_factory_default&rev=1522829469

Last update: 2018/04/04 17:11