


CoreStation	1
CoreStation	4
	8

, BioStar 2, CoreStation, “P2”, “R2”

CoreStation


BioStar 2.53

CoreStation BioEntry Plus
BioEntry P2, CoreStation BioEntry R2가

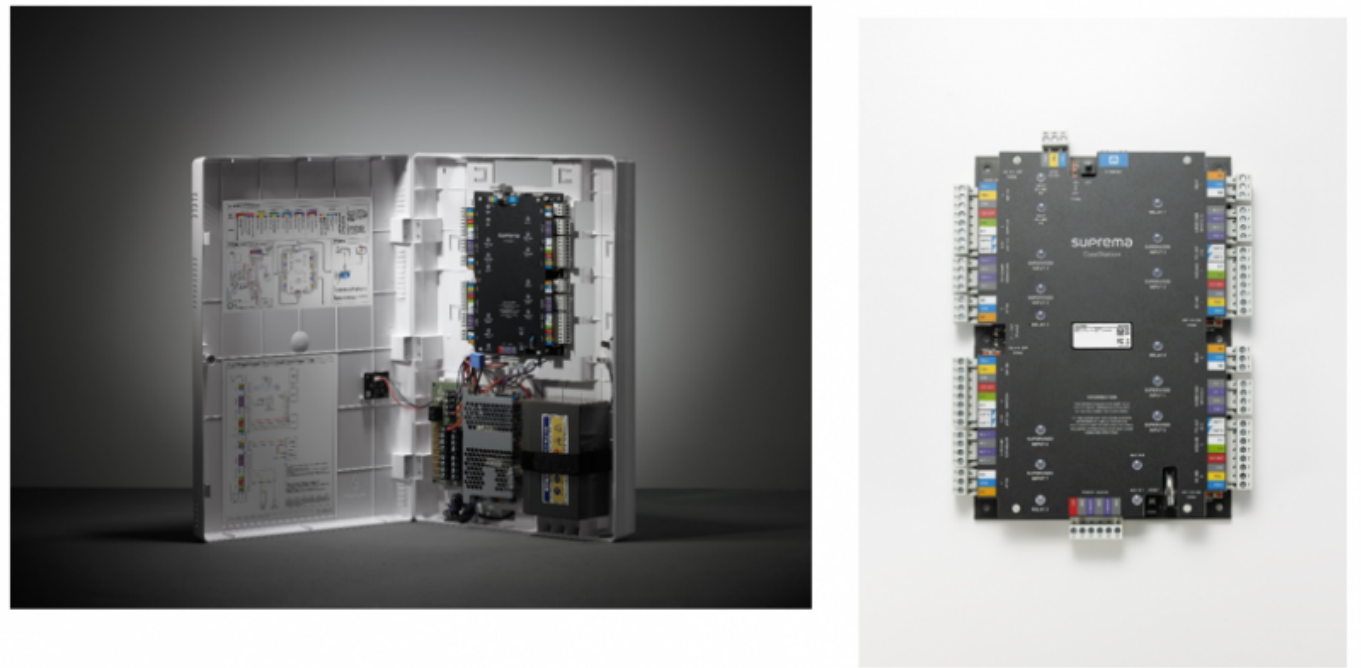

CoreStation

CoreStation 4 Wiegand , 4 Wiegand , 5 RS-485 가

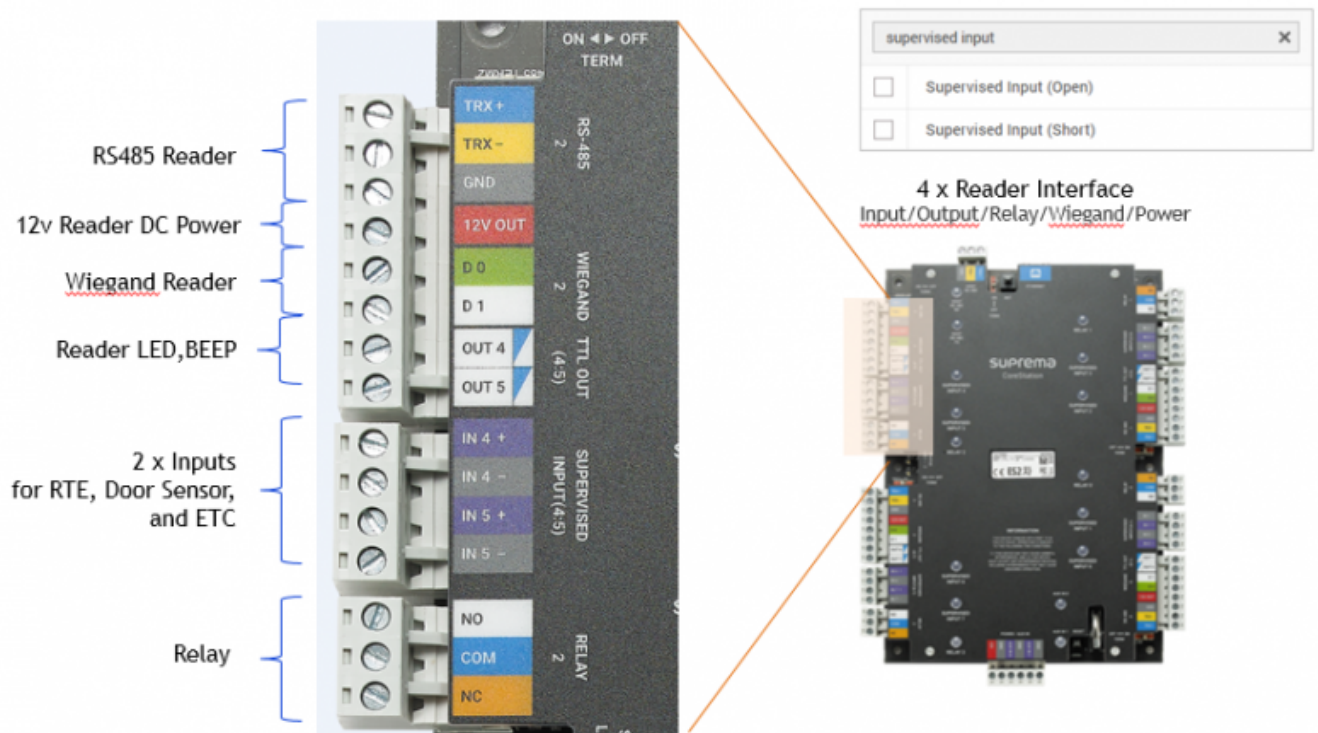

DM-20 Supervised input ,

가

400,000 가

가 1:1

500,000

1,000,000



가

RS-485

4	Wiegand	가 32 DM-20 , CoreStation Wiegand
		CoreStation 132 .

FaceStation 2

System Configurations

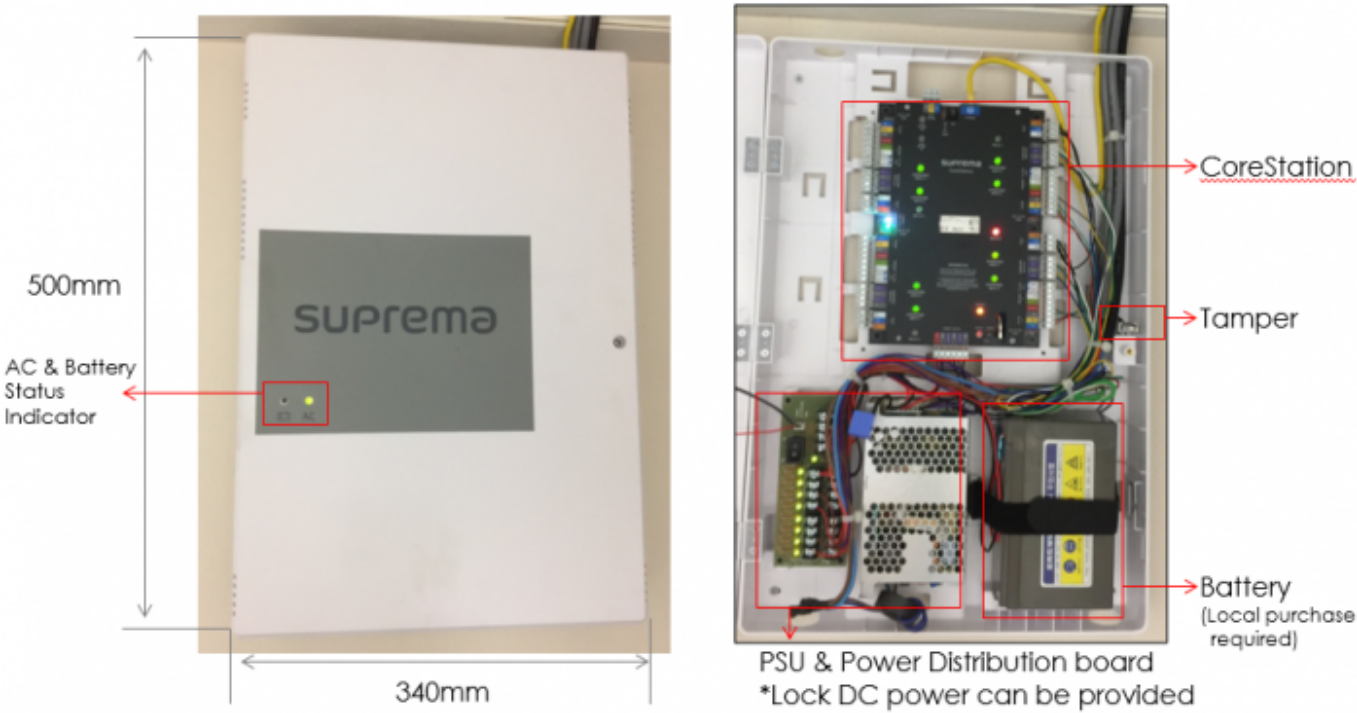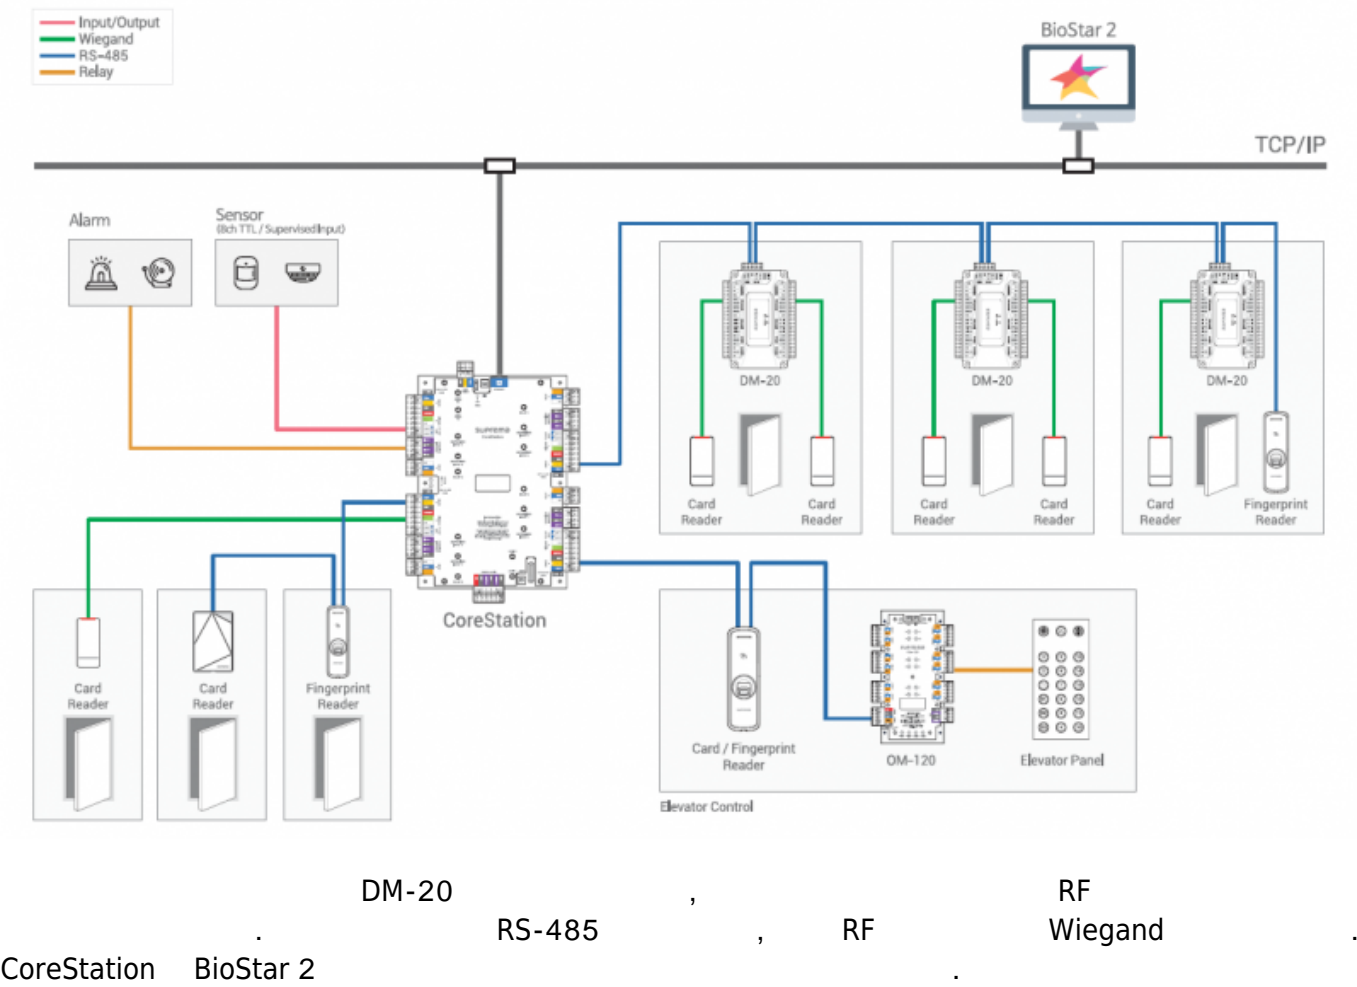

CoreStation

(ENCR-10,)

	가	,	가
CoreStation	30	.	
	가	가	.
CoreStation			
CoreStation			PDF
	.		

CoreStation Configuration Options



[BioEntry R2 / BioEntry P2]

BioEntry R2	BioEntry P2	BioStar 2.5	.	가
.	R2	,		
	RS-485	.		

[A&E specification page](#)

CoreStation

CoreStation	,	RS-485	.
1. BioStar 2	.		
2. (DEVICE)	.		
3. (Search Device)	.		
4. CoreStation	가(Add)	.	

Search Device

Found 5 device(s). 3 device(s) have invalid IP addresses.

Search

	Device ID	Name	Group	Device Type (Master/Slave)	IP Address	Status	Secure Mode Status
<input type="checkbox"/>	53129	Xpass 53129 (192.168.14.2...)	All Devices	Xpass	192.168.14.223	OK	Connectable.
<input checked="" type="checkbox"/>	542070072	CoreStation 40 542070072 ...	All Devices	CoreStation 40	192.168.14.105	OK	Connectable.
<input type="checkbox"/>	544108066	BioEntry W2 544108066 (192.168.14.226)	All Devices	BioEntry W2	192.168.14.226	N/A (192.168.14.14)	Connectable.
<input type="checkbox"/>	939254397	BioStation A2 939254397 (192.168.14.109)	All Devices	BioStation A2	192.168.14.109	N/A (192.168.1.23)	Connectable.
<input type="checkbox"/>	777777777	FaceStation 2 777777777 (192.168.14.183)	All Devices	FaceStation 2	192.168.14.183	N/A (192.168.14.14)	Connectable.

Set IP

Add

Close

5. CoreStation

(Search Slave Device)

6. (Search)

가

Search Slave Device

Search


	Port	Device ID	Name	Device Type
<input checked="" type="checkbox"/>	RS485 Port 1	541150088	BioEntry P2 541150088	BioEntry P2
<input checked="" type="checkbox"/>	RS485 Port 2	865638027	BioEntry R2 865638027	BioEntry R2

CoreStation 40 542070072 (192.168.14.105) has 2 slave Device(s).

Add

Cancel


7. CoreStation

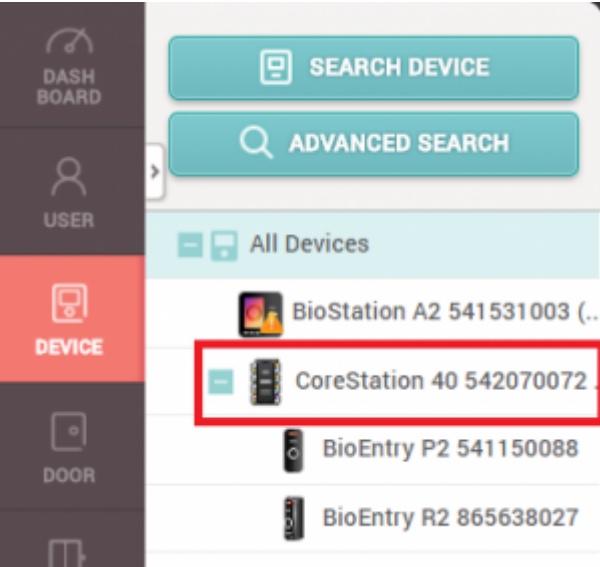


8. CoreStation Aux

(Tamper) AC (AC Fail)

(Advanced)

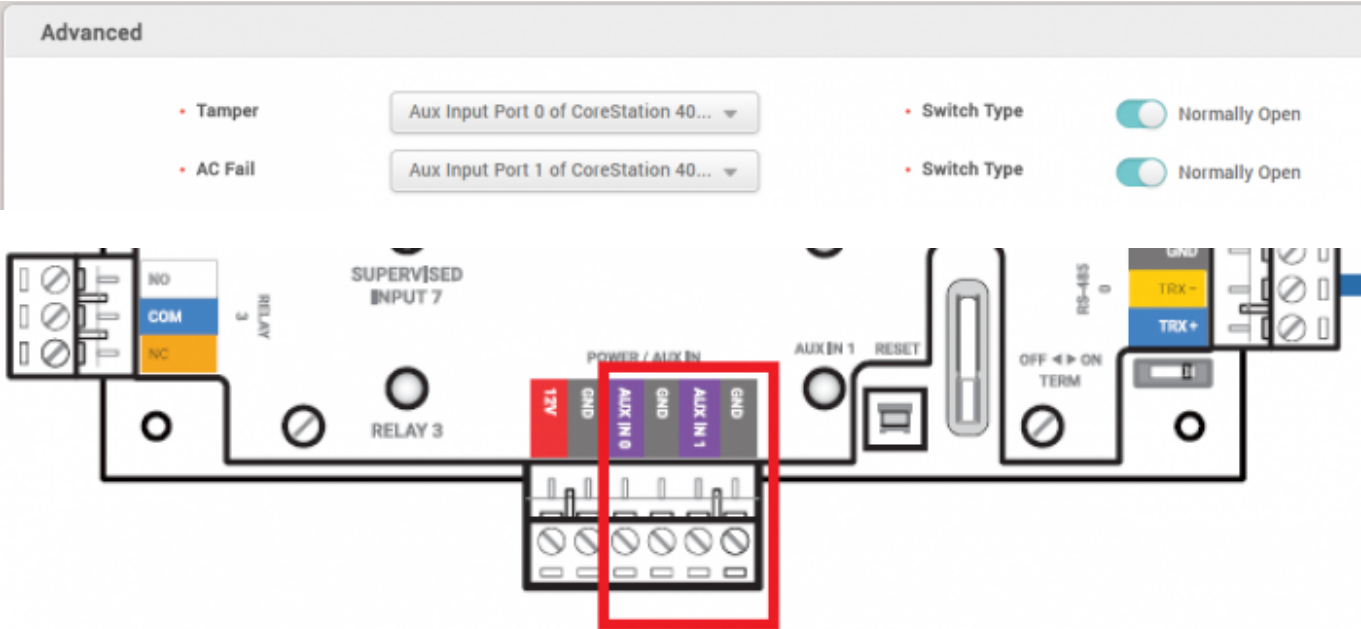

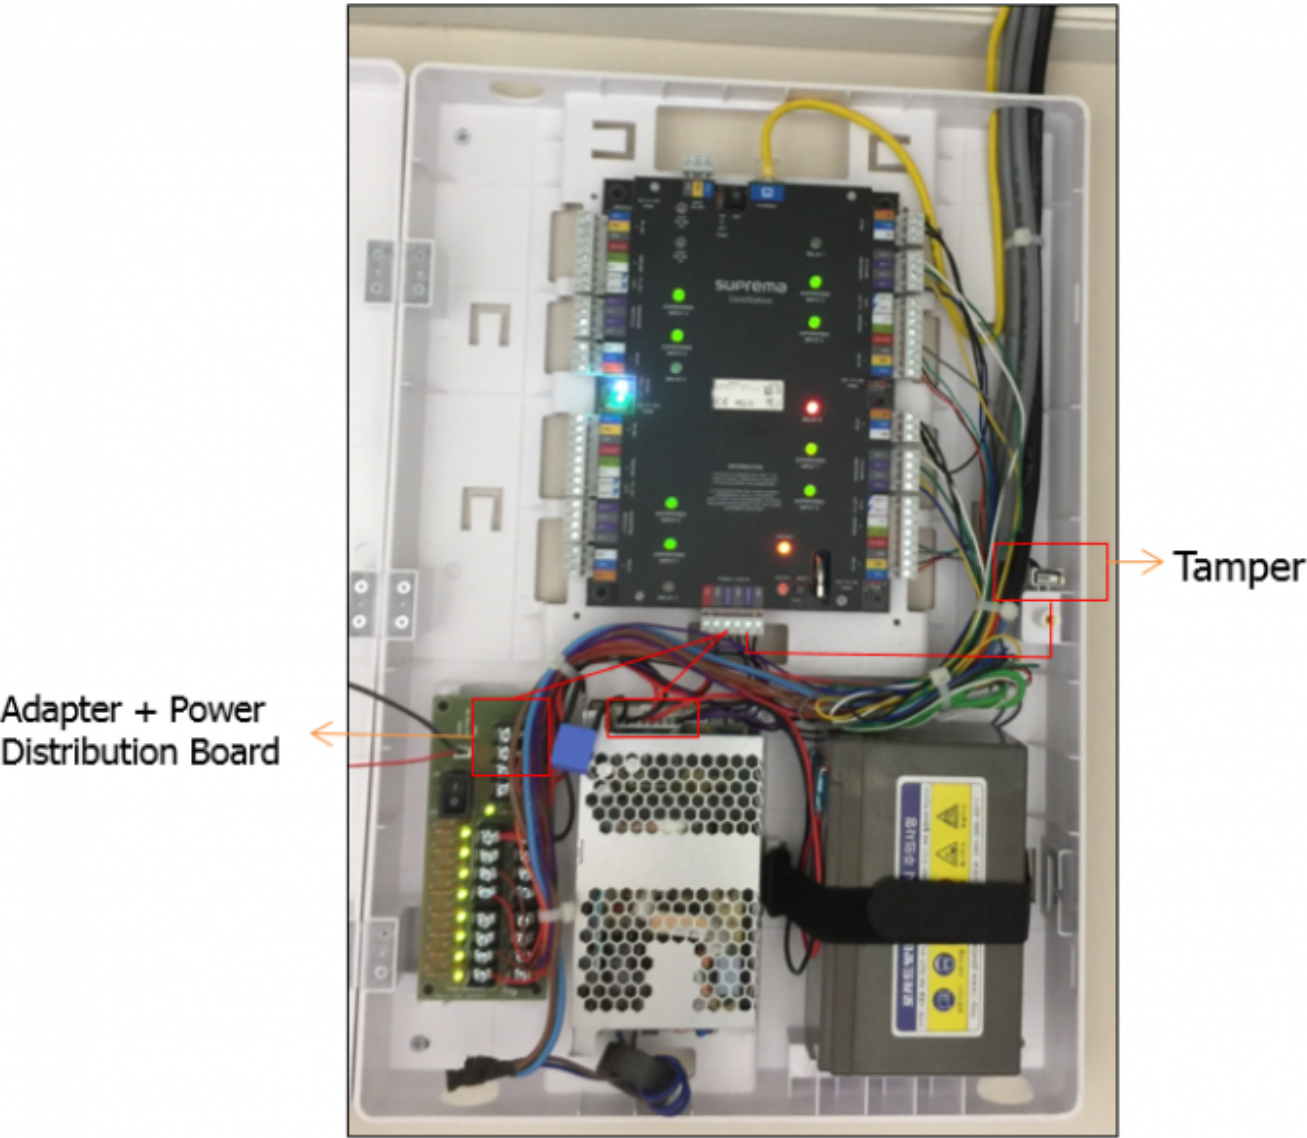

9. Supervised input

, Supervised Input

..

Supervised Input			
• Configuration			
Index	Supervised		Supervised Input Resistor
0	<input checked="" type="checkbox"/>	Supervised Input	2.2k Ω
1	<input checked="" type="checkbox"/>	Supervised Input	2.2k Ω
2	<input checked="" type="checkbox"/>	Supervised Input	2.2k Ω
3	<input checked="" type="checkbox"/>	Supervised Input	2.2k Ω
4	<input checked="" type="checkbox"/>	Supervised Input	2.2k Ω
5	<input checked="" type="checkbox"/>	Supervised Input	2.2k Ω
6	<input checked="" type="checkbox"/>	Supervised Input	2.2k Ω
7	<input checked="" type="checkbox"/>	Supervised Input	2.2k Ω

Supervised input

. [DM-20](#)

[2x_sysconfig_corestation_video.mp4](#)

From:

<https://kb.supremainc.com/knowledge/> -

Permanent link:

https://kb.supremainc.com/knowledge/doku.php?id=ko:how_to_configure_corestation&rev=1531277641

Last update: **2018/07/11 11:54**