

CoreStation	.....	1
CoreStation	.....	4
	.....	8

, BioStar 2, CoreStation, "P2", "R2"

CoreStation

BioStar 2.53

BioEntry P2, CoreStation




CoreStation BioEntry Plus  
BioEntry R2가





CoreStation

CoreStation	4	Wiegand	
485	가	, 4 Wiegand	5 RS-

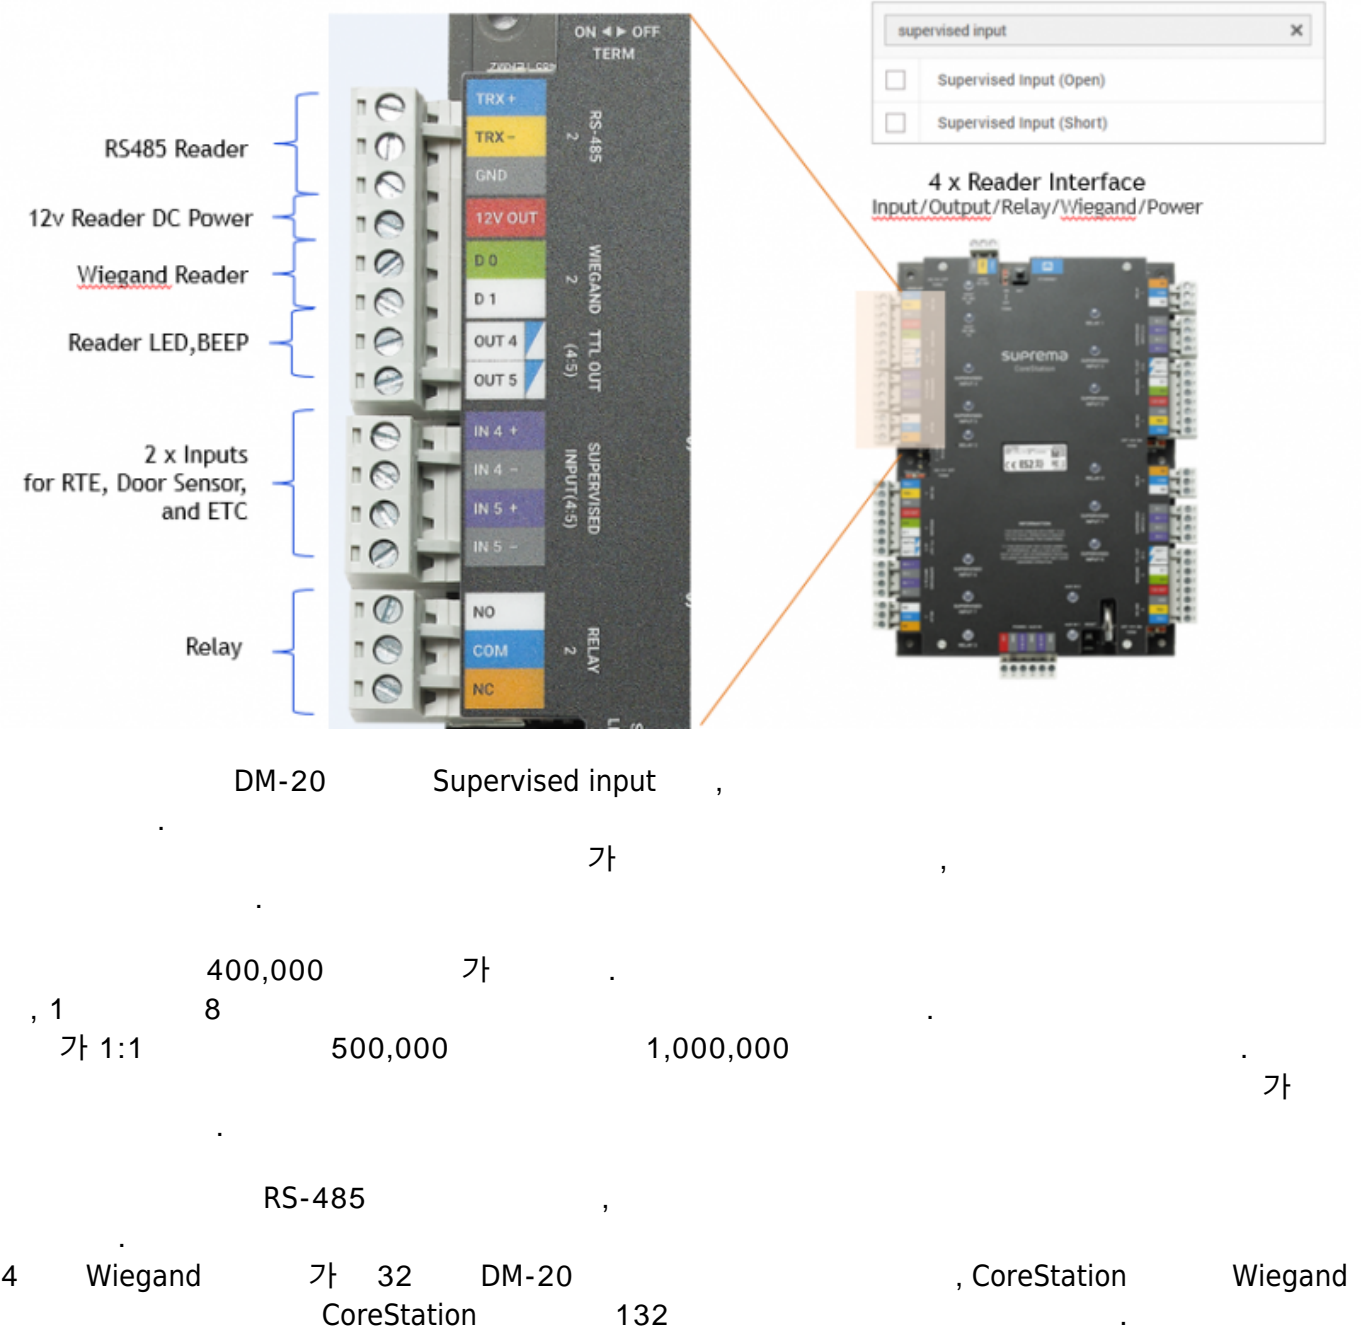

FaceStation 2

System Configurations

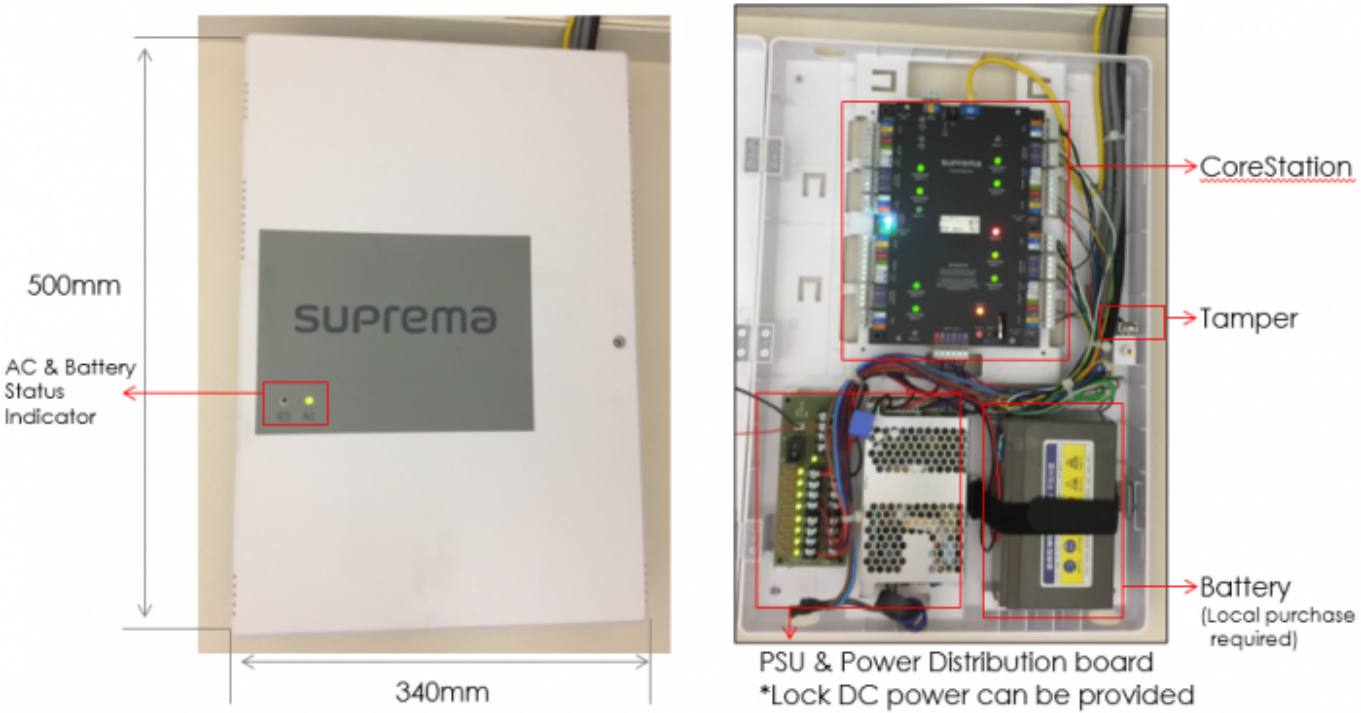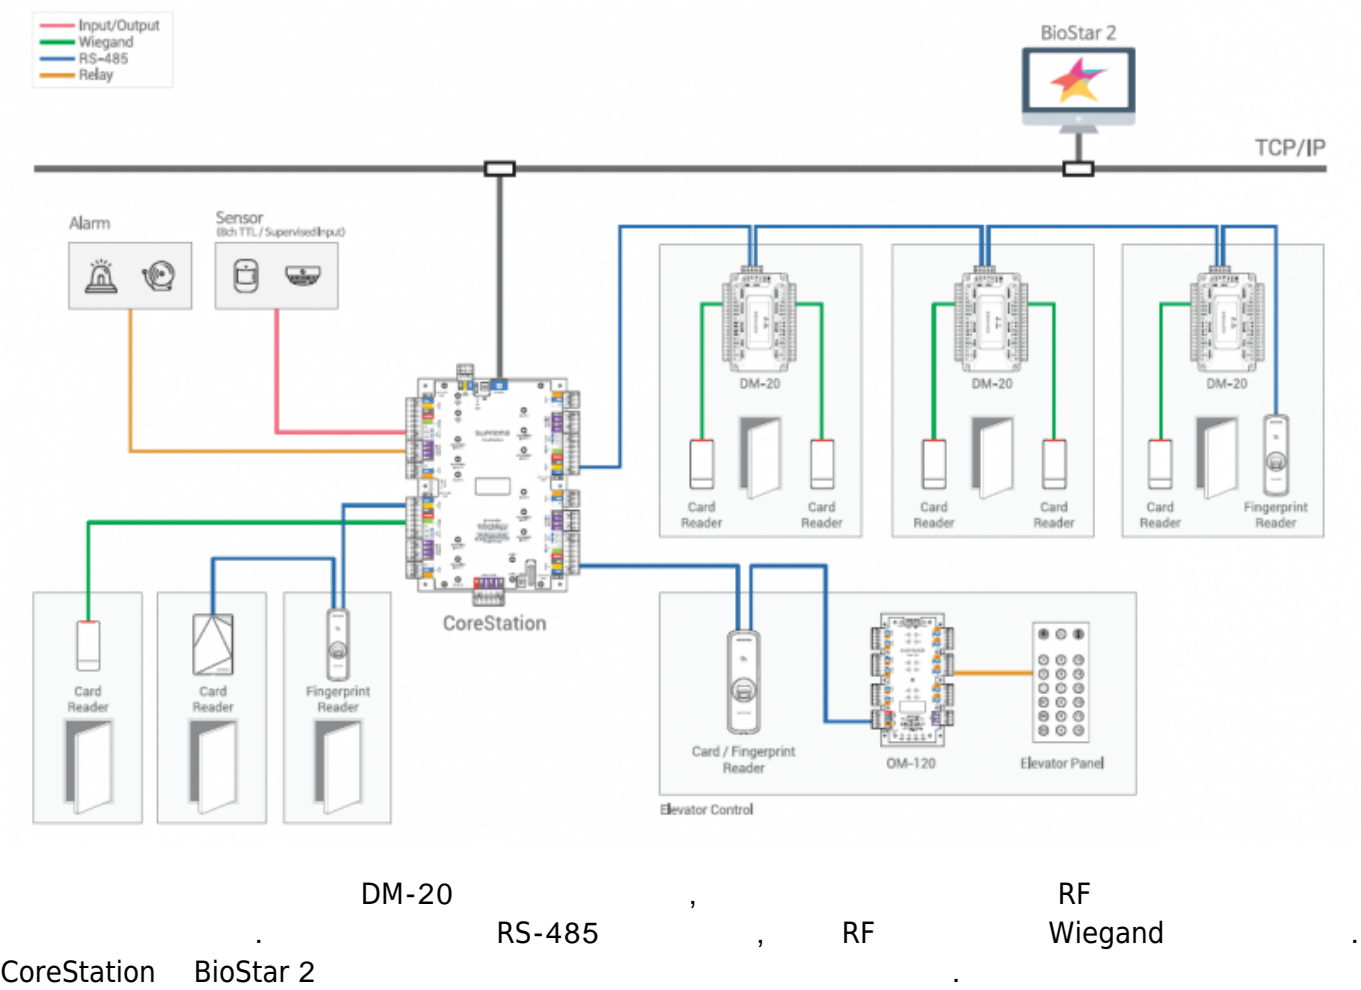

가 , 가

CoreStation 30 .

가 가 .

CoreStation .

CoreStation PDF

### CoreStation Configuration Options



[BioEntry R2 / BioEntry P2]

BioEntry R2 BioEntry P2 BioStar 2.5 가

R2 ,

RS-485 .

[A&E specification page](#)

## CoreStation

CoreStation , RS-485 .

1. BioStar 2 .
2. **(DEVICE)** .
3. **(Search Device)** .
4. CoreStation 가 **(Add)** .

Search Device

Found 5 device(s). 3 device(s) have invalid IP addresses.

Search

	Device ID	Name	Group	Device Type (Master/Slave)	IP Address	Status	Secure Mode Status
<input type="checkbox"/>	53129	Xpass 53129 (192.168.14.2...	All Devices	Xpass	192.168.14.223	OK	Connectable.
<input checked="" type="checkbox"/>	542070072	CoreStation 40 542070072 ...	All Devices	CoreStation 40	192.168.14.105	OK	Connectable.
<input type="checkbox"/>	544108066	BioEntry W2 544108066 (192.168.14.226)	All Devices	BioEntry W2	192.168.14.226	N/A (192.168.14.14)	Connectable.
<input type="checkbox"/>	939254397	BioStation A2 939254397 (192.168.14.109)	All Devices	BioStation A2	192.168.14.109	N/A (192.168.1.23)	Connectable.
<input type="checkbox"/>	777777777	FaceStation 2 777777777 (192.168.14.183)	All Devices	FaceStation 2	192.168.14.183	N/A (192.168.14.14)	Connectable.

Set IP

Add

Close

5. CoreStation

(Search Slave Device)

6. (Search)

가

Search Slave Device

Search


<input checked="" type="checkbox"/>	Port	Device ID	Name	Device Type
<input checked="" type="checkbox"/>	RS485 Port 1	541150088	BioEntry P2 541150088	BioEntry P2
<input checked="" type="checkbox"/>	RS485 Port 2	865638027	BioEntry R2 865638027	BioEntry R2

CoreStation 40 542070072 (192.168.14.105) has 2 slave Device(s).

Add

Cancel


7. CoreStation

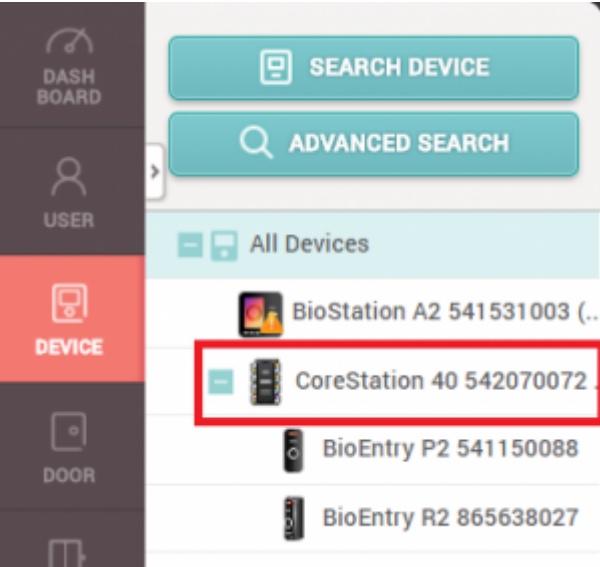


8. CoreStation Aux

(Tamper)    AC    (AC Fail)

(Advanced)

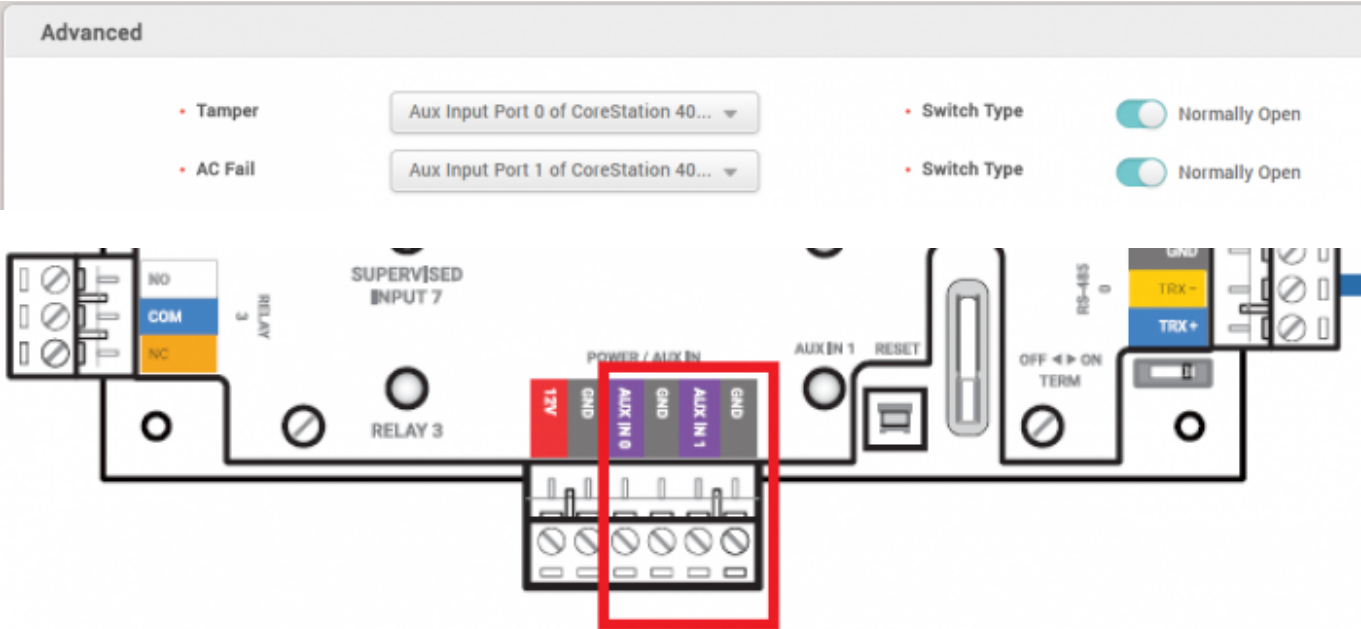



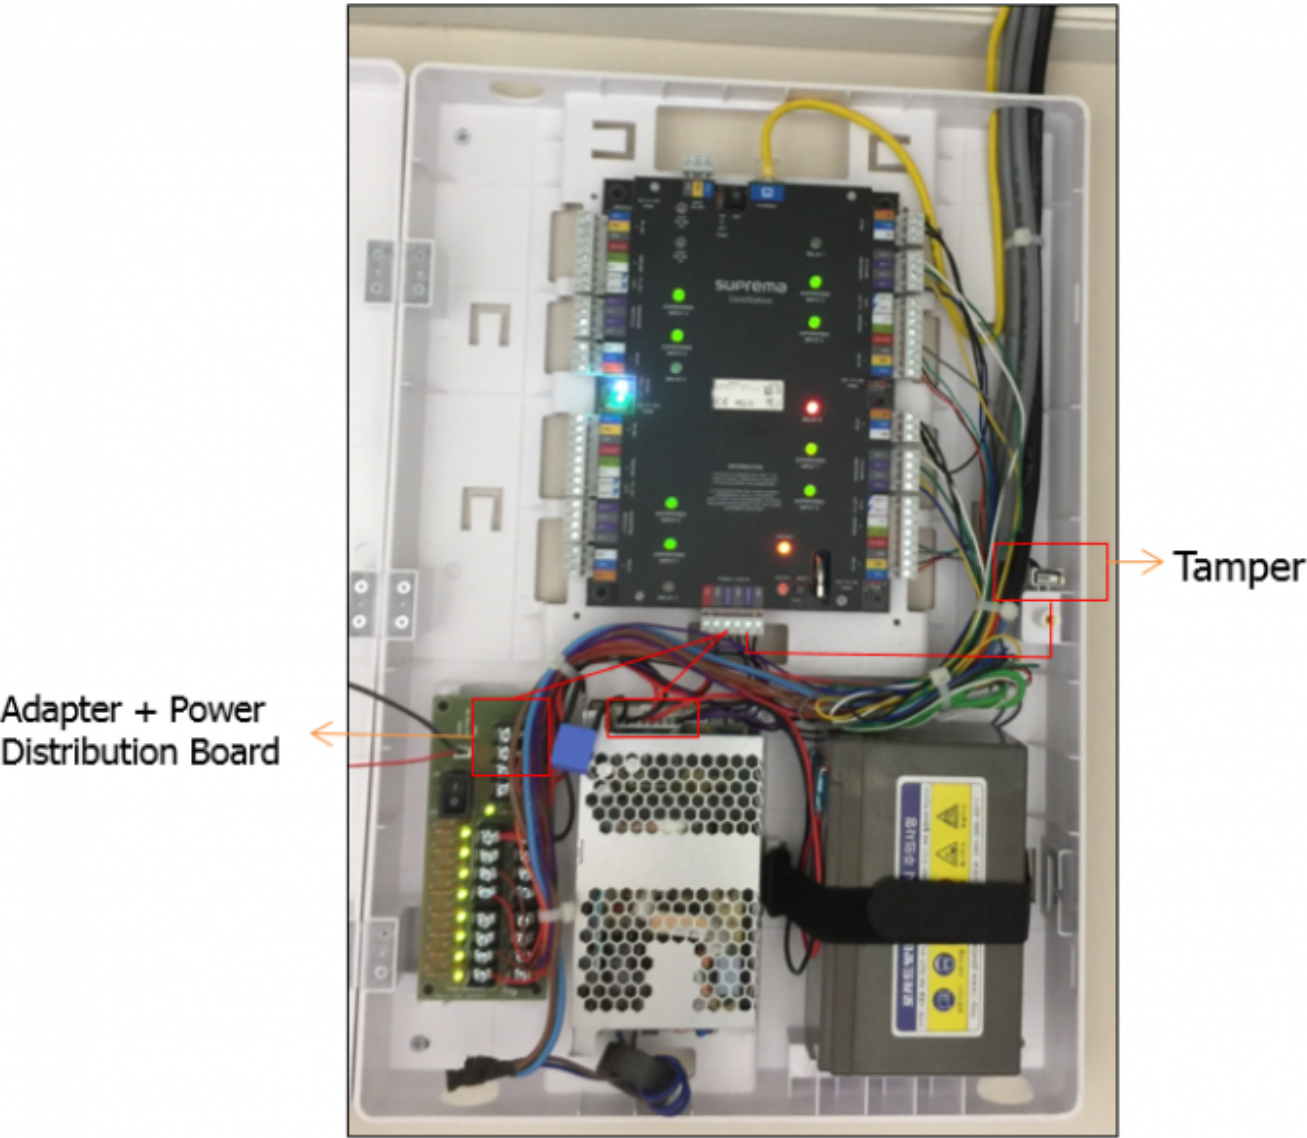

9. Supervised input

, Supervised Input

..

Supervised Input

• Configuration

Index	Supervised	Supervised Input Resistor
0	<input checked="" type="checkbox"/> Supervised Input	2.2k $\Omega$ ▼
1	<input checked="" type="checkbox"/> Supervised Input	2.2k $\Omega$ ▼
2	<input checked="" type="checkbox"/> Supervised Input	2.2k $\Omega$ ▼
3	<input checked="" type="checkbox"/> Supervised Input	2.2k $\Omega$ ▼
4	<input checked="" type="checkbox"/> Supervised Input	2.2k $\Omega$ ▼
5	<input checked="" type="checkbox"/> Supervised Input	2.2k $\Omega$ ▼
6	<input checked="" type="checkbox"/> Supervised Input	2.2k $\Omega$ ▼
7	<input checked="" type="checkbox"/> Supervised Input	2.2k $\Omega$ ▼



Supervised input

. [DM-20](#)

[2x\\_sysconfig\\_corestation\\_video.mp4](#)

From:

<http://kb.supremainc.com/knowledge/> -

Permanent link:

[http://kb.supremainc.com/knowledge/doku.php?id=ko:how\\_to\\_configure\\_corestation&rev=1533711390](http://kb.supremainc.com/knowledge/doku.php?id=ko:how_to_configure_corestation&rev=1533711390)

Last update: **2018/08/08 15:56**