

Wiegand	CoreStation	.....	1
		.....	7

Wiegand

CoreStation

\*CoreStation

CoreStation

Wiegand


CoreStation

- 1) HID Proximity      5355
- 2) CoreStation
- 3) 125kHz HID Prox

1. CoreStation      가

CoreStation      가


Wiegand IN

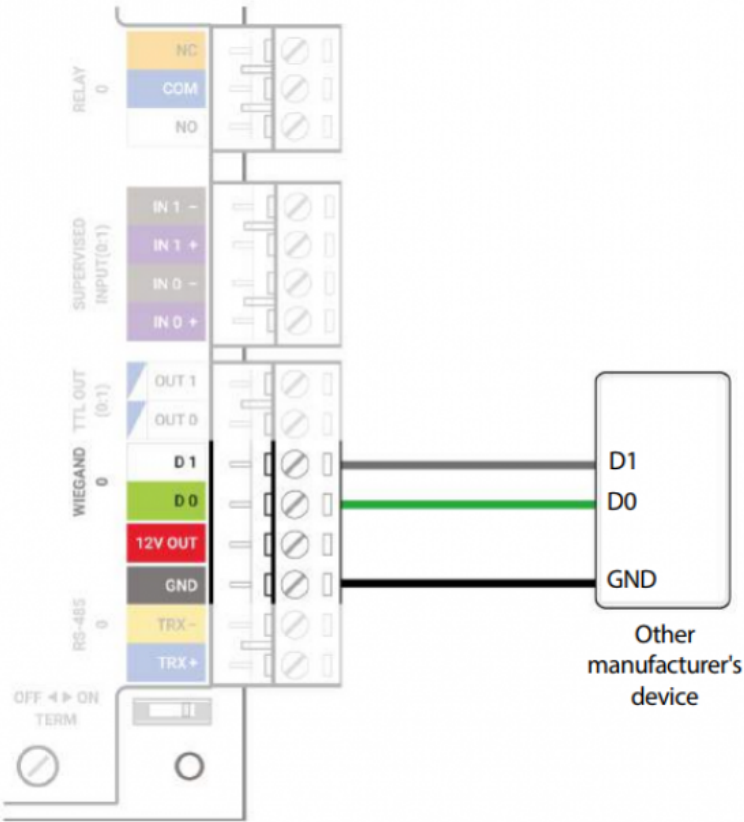

2.      WIEGAND 2


3.      Wiegand      가



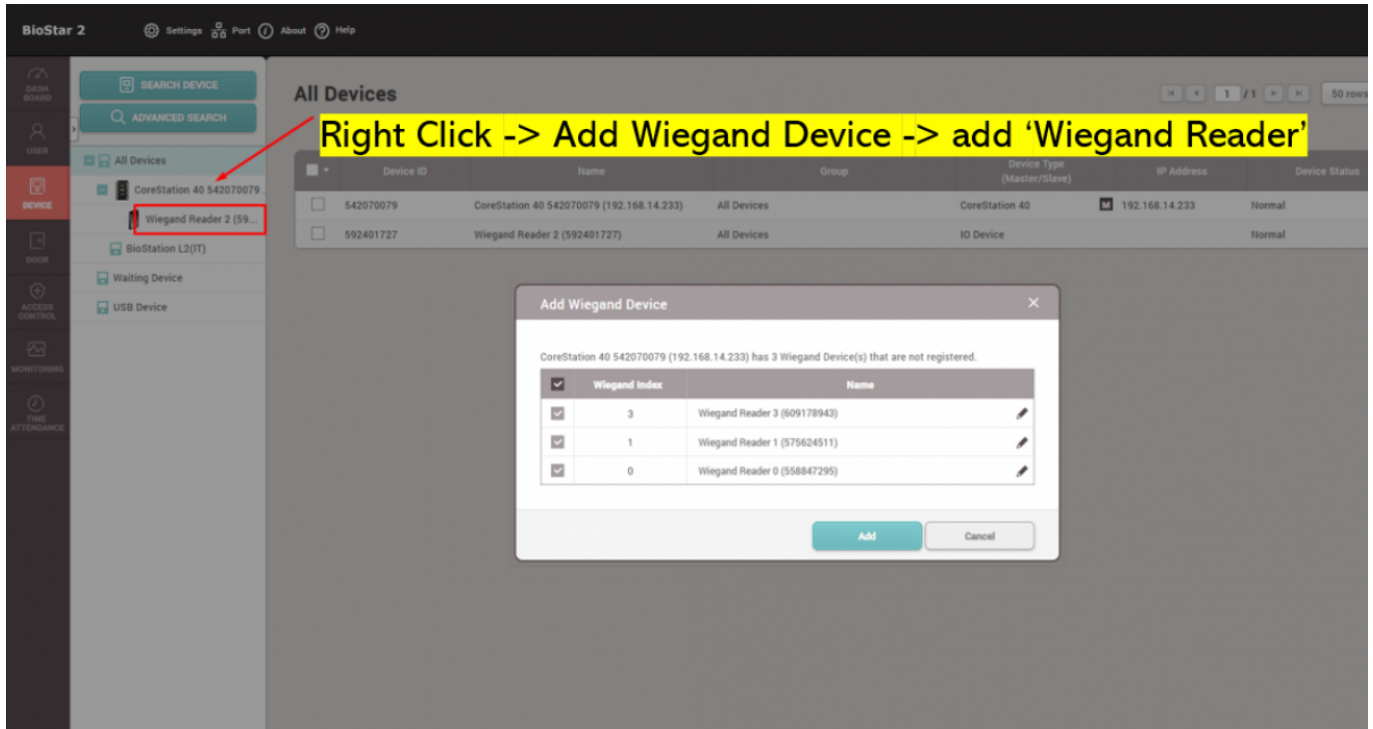


7. 가 Wiegand Reader 2 . LED

- 4 5가 Wiegand 2 가

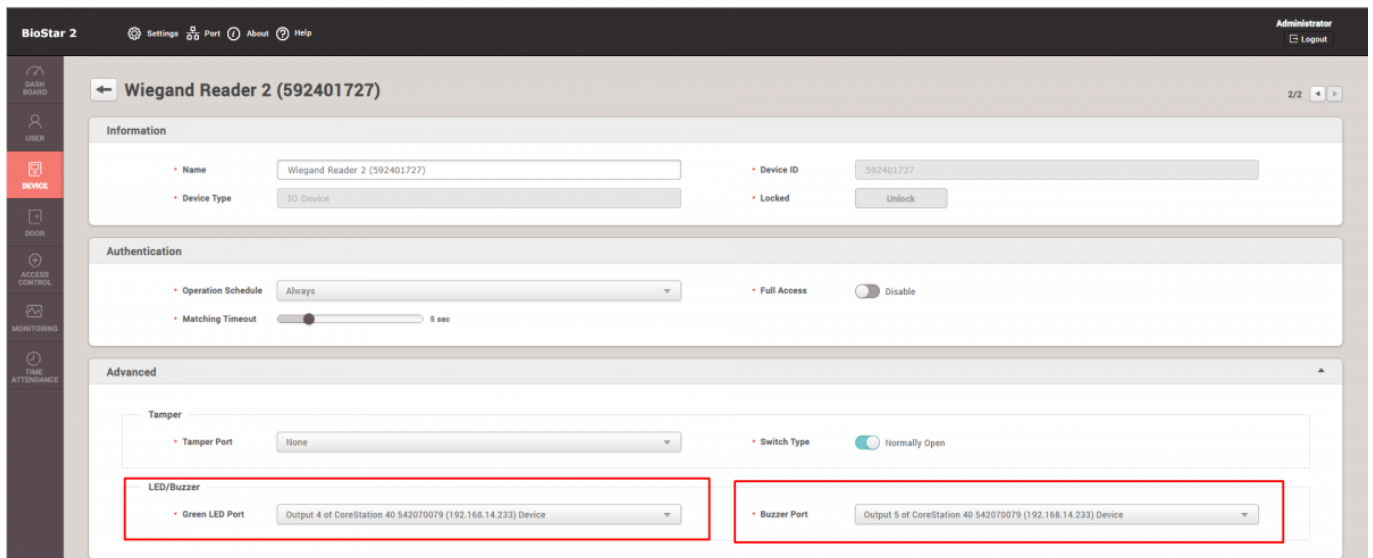

8. 가 +

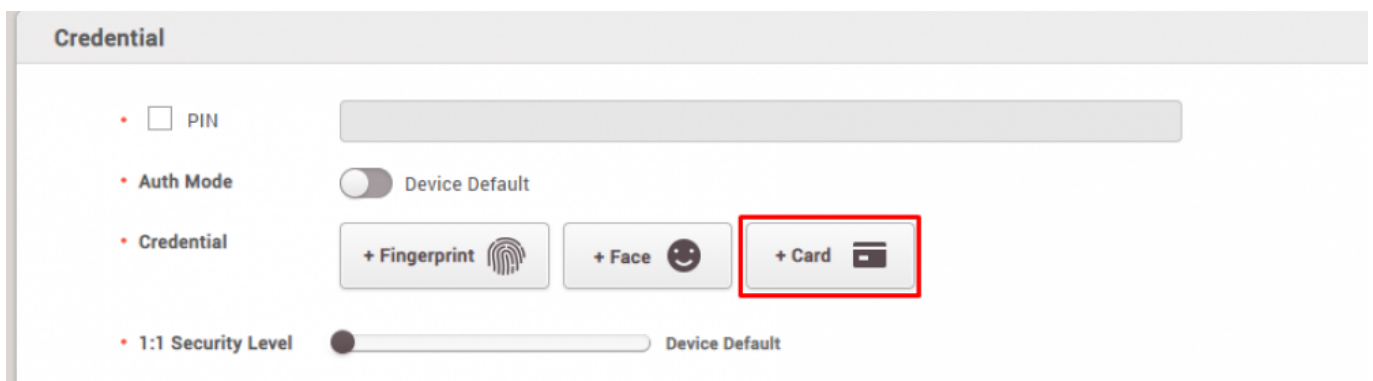

- |    |                       |                           |                     |
|----|-----------------------|---------------------------|---------------------|
| 9. | (Enroll Card)         | Wiegand                   | 26 bit SIA Standard |
| 1) | (Registration Option) | (Register by Card Reader) |                     |
| 2) | Wiegand Reader 2      |                           |                     |
| 3) | (Read Card)           |                           |                     |
| 3) | (Enroll)              |                           |                     |

Enroll Card

• Card Type

Wiegand

• Card Data Format

26 bit SIA Standard-H10301

• Registration Option

Register by Card Reader

• Device

Wiegand Reader 2 (592401727)

Information

• Facility Code

254

Read Card

• Card ID 1


51495

Enroll

Cancel

**\* (Apply)**

**Information**





 + Add Photo

• Name: Administrator  
 • ID: 1  
 • Group: All Users  
 • Period: 2001/01/01 00:00 - 2030/12/31 23:59  
 • Operator Level: Administrator  
 • Login ID: admin  
 • Password: \*\*\*\*\*

• Email:   
 • Telephone:   
 • Status: ☒ Active  
 • Access Group:

**Credential**

• ☐ PIN  
 • Auth Mode: ☒ Device Default  
 • Credential: + Fingerprint + Face + Card  
 • 1:1 Security Level:  Device Default

Type	Card Data Format	Summary	
Fingerprint	-	1	 
Wiegand	26 bit SIA Standard-H10301	ID: 254-51495	 

**Apply**

10. Wiegand ID가 CoreStation에 등록되어 LED가 켜지는지 확인합니다.

**BioStar 2** Settings Part About Help Administrator Logout

Event Log Real-time Log Device Status Door Status Alert History


**Real-time Log**

Save Filter Pause Clear


Date	Door	Device ID	Device	User	Event	View
2018/10/30 11:39:53		592401727	Wiegand Reader 2 ...	1(Administrator)	1:1 authentication succeeded (Card)	

11. Suprema가
- 1) Wiegand Reader 2 (Entry Device)
  - 2) Relay 2 (Door Relay)
  - 3) (Exit Button) (Door Sensor) Supervised Inputs 4 5
  - 4) (Open Time) 가




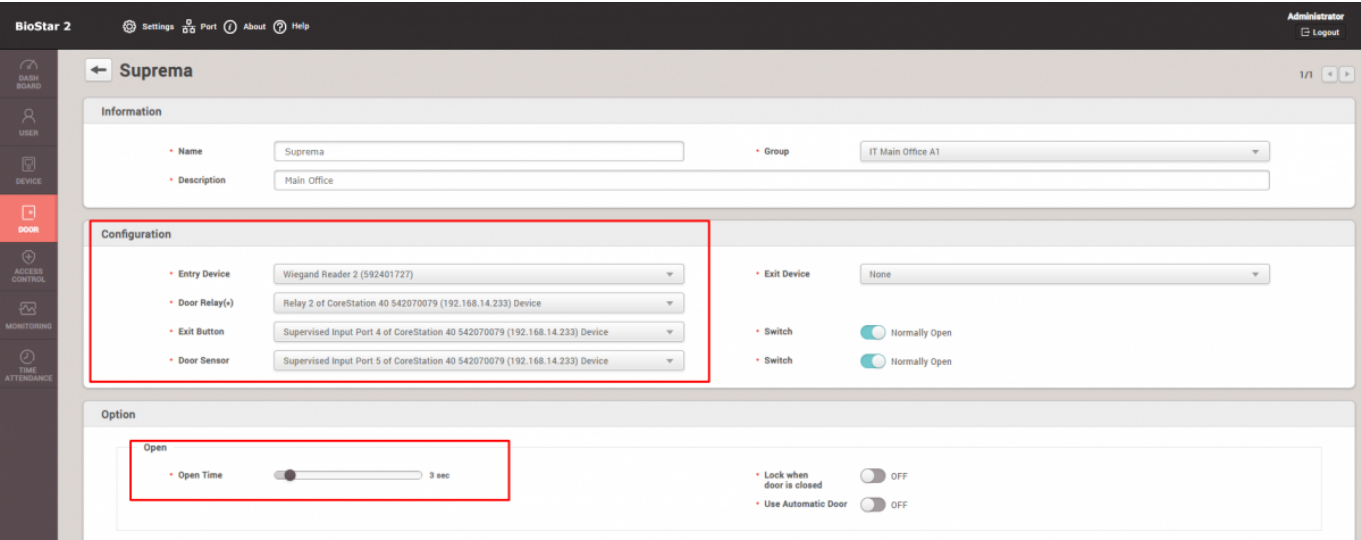

12. CoreStation  
Supervised Inputs 4 5  
Supervised Inputs 4 5가 LED  
\* Supervised Inputs 2.2kΩ DM-20

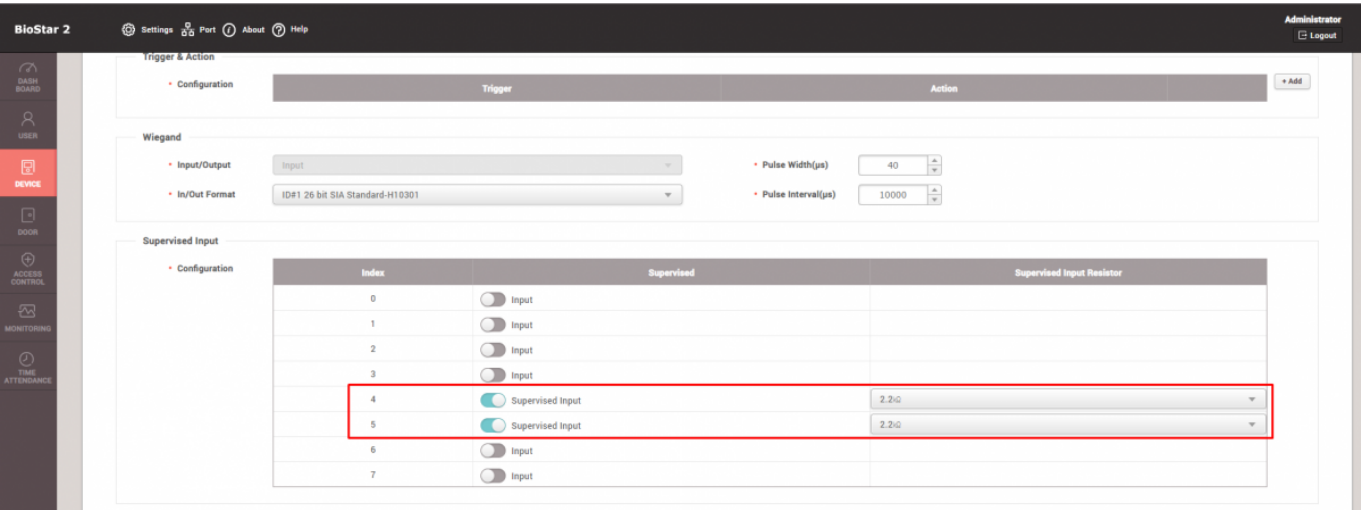

13. (Real-time Log) Wiegand  
가  
Relay 2 LED가  
가 11

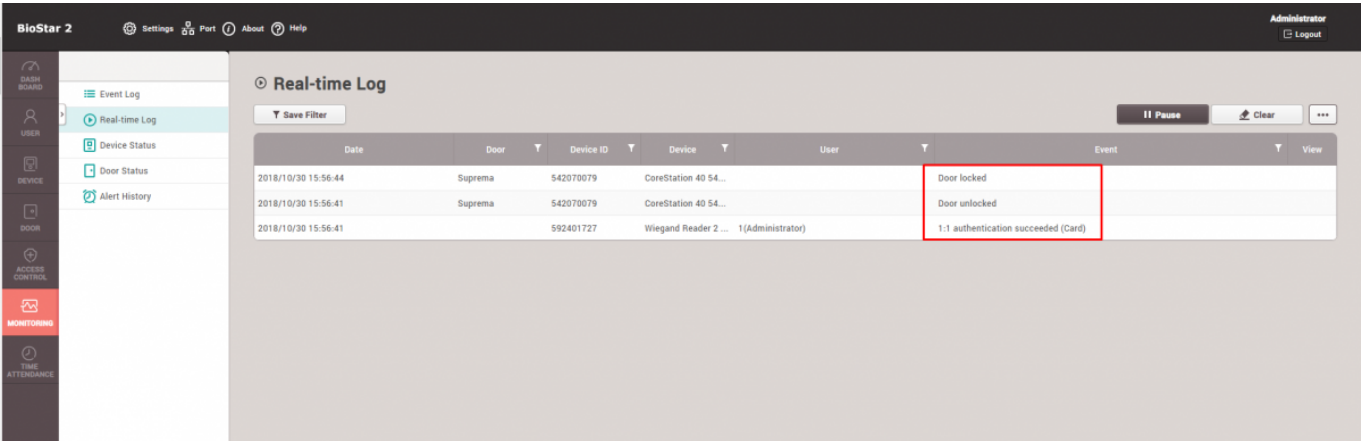

[lxio6068.mp4](#)

From:

<http://kb.supremainc.com/knowledge/> -

Permanent link:

[http://kb.supremainc.com/knowledge/doku.php?id=ko:how\\_to\\_configure\\_corestation\\_with\\_an\\_external\\_wiegand\\_device](http://kb.supremainc.com/knowledge/doku.php?id=ko:how_to_configure_corestation_with_an_external_wiegand_device)

Last update: **2019/09/27 12:42**