


	1
	2
1:	2
2:	3

가 가 .

1:

(Setting) > (SERVER) (Secure communication with device)
(Not Use)

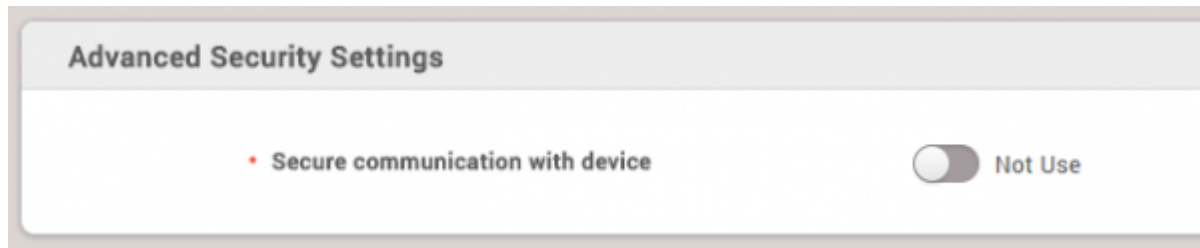

1. (DEVICE) (Advanced)
2. (Secure Tamper) (On)

* Secure Tamper  On * All the users, logs, and encryption key in the device will be removed at the secure tamper event.

3. (Tamper On) 가 BioStar 2 가 .

Tamper on

• Device

BioStation A2 541531003
(192.168.14.207)

• Alarm

Tamper on

• Date

2018/04/02 18:26:28

Comment

Acknowledge

Ignore

Real-time Log

Save Filter

Pause


Clear

...


Date	Door	Elevator	Device ID	Device	User	Zone	Event	View
2018/04/02 18:29:47			541531003	BioStation A2 5...			Device Disconnection Detected	
2018/04/02 18:29:46			541531003	BioStation A2 5...			Database Reset	
2018/04/02 18:29:46			541531003	BioStation A2 5...			Tamper on	
2018/04/02 18:29:46			541531003	BioStation A2 5...			Event log cleared	
2018/04/02 18:29:45			541531003	BioStation A2 5...			Tamper on	
2018/04/02 18:29:45			541531003	BioStation A2 5...			Tamper off	

2:

(Setting) > (SERVER) (Secure communication with device)
 (Use) 가 (Server &
 device encryption key manual management)

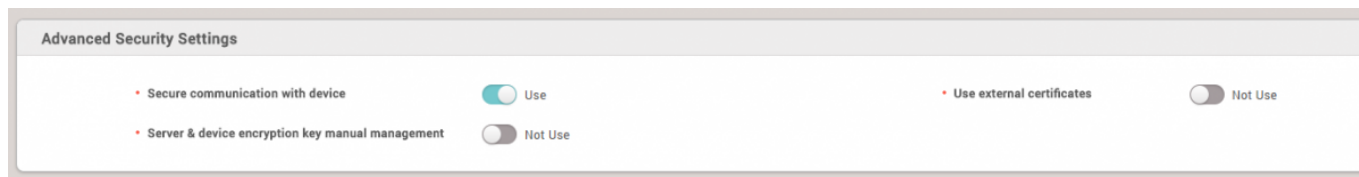

(Use) (Server & device encryption key manual management) (Secure
Tamper)

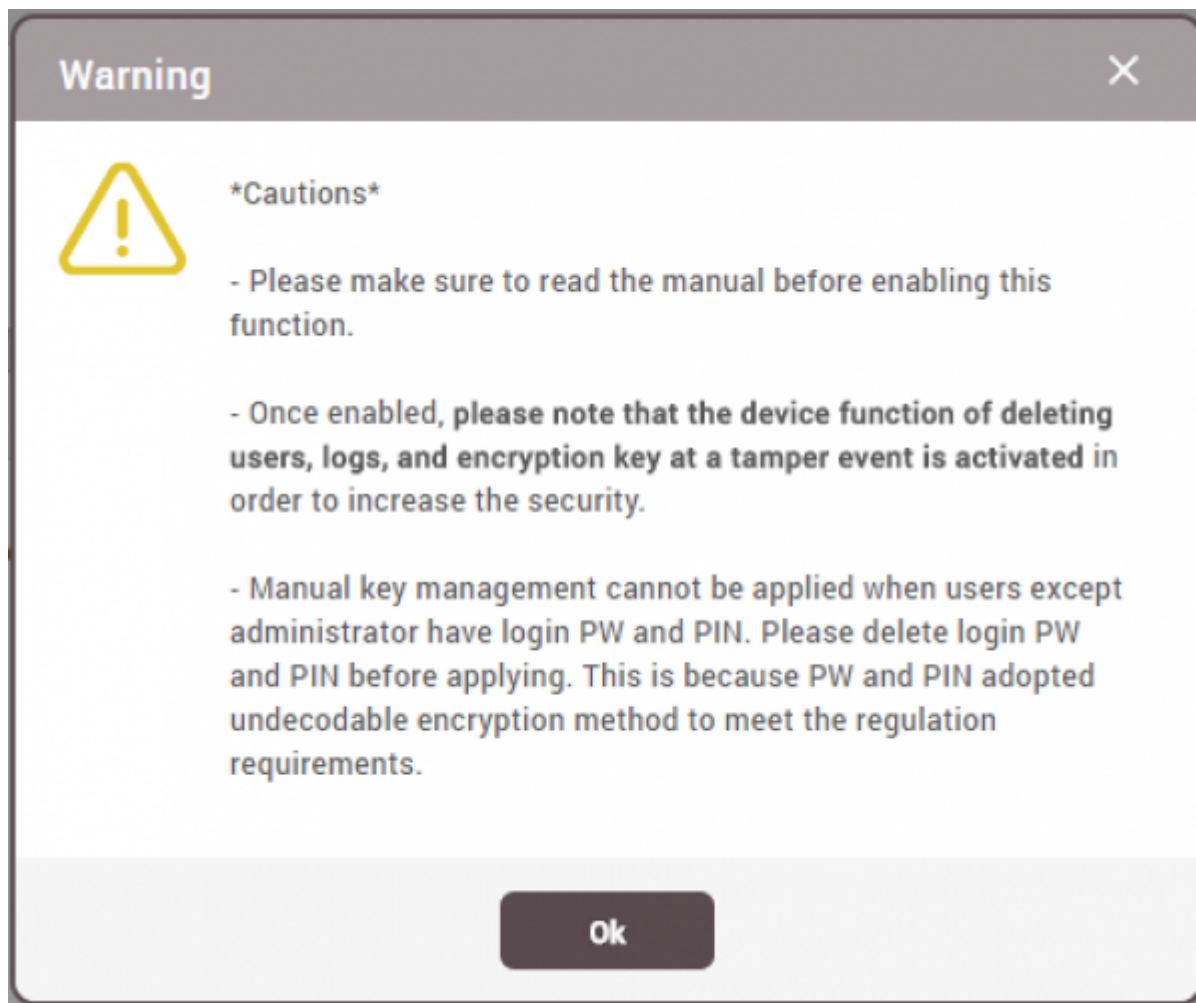

From:
<http://kb.supremainc.com/knowledge/> -

Permanent link:
http://kb.supremainc.com/knowledge/doku.php?id=ko:how_to_configure_secure_tamper

Last update: **2018/07/11 17:14**