


.....	1
.....	4

, BioStar 2,

1. 가 .

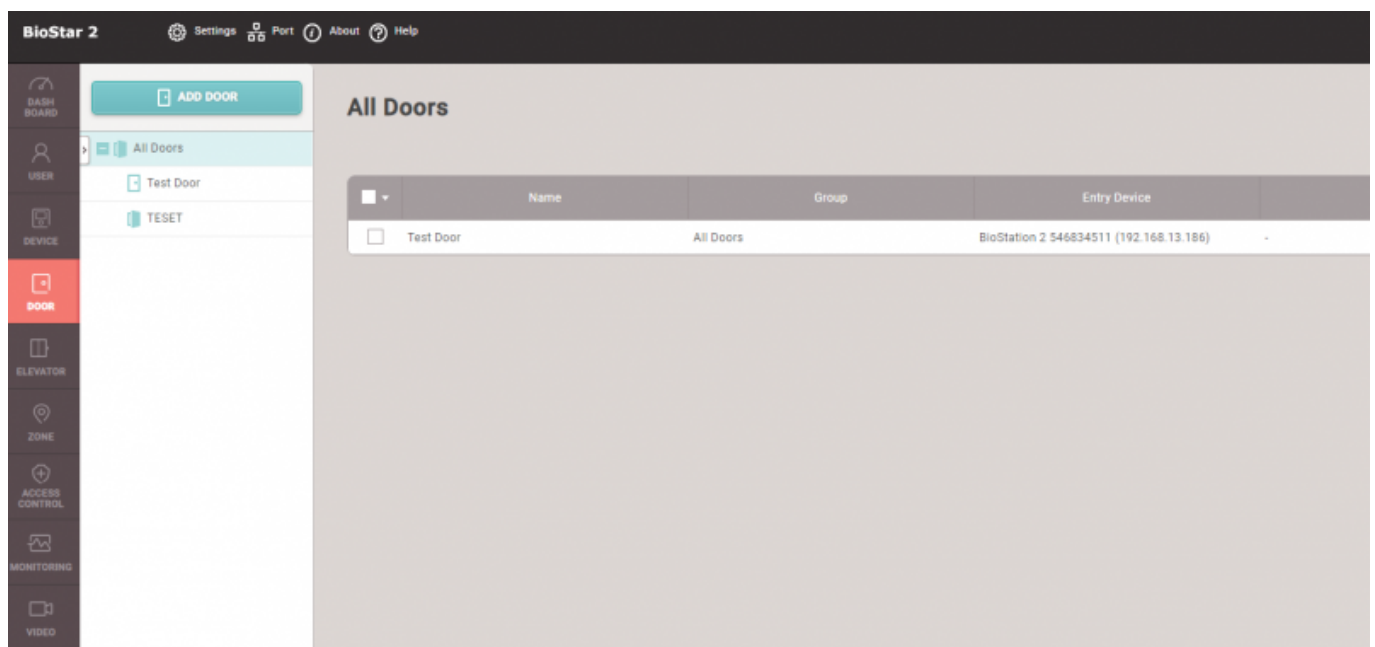

BioStar 2

SettingAboutHelp

DASH BOARD

USER

DEVICE

DOOR

ZONE

ACCESS CONTROL

←

Add New Door

Information

Name

BMS Front Door

Description

Test Door Setting

Group

16F BMS

Configuration

Entry Device

None

Door Relay(×)

None

Exit Button

None

Door Sensor

None

2.가

IO (Secure IO 2, DM-20 )

Configuration

Entry Device

BioLitelet 538101264 (192.168.16.210)

Door Relay(×)

Relay 0 of BioLitelet 538101264 (192.168.16.210) Device

Exit Button

Input Port 0 of BioLitelet 538101264 (192.168.16.210) Device

Door Sensor

Input Port 1 of BioLitelet 538101264 (192.168.16.210) Device

Exit Device

BioEntryW 15

Switch

Normally Open

Switch

Normally Open

Option

Open

Open Time

3 sec

Lock when door is closed

Off

Dual Authentication

Device

No device

3.가  
+가

Alarm


Held Open

Action

+ Add

Held Open Time


5 sec

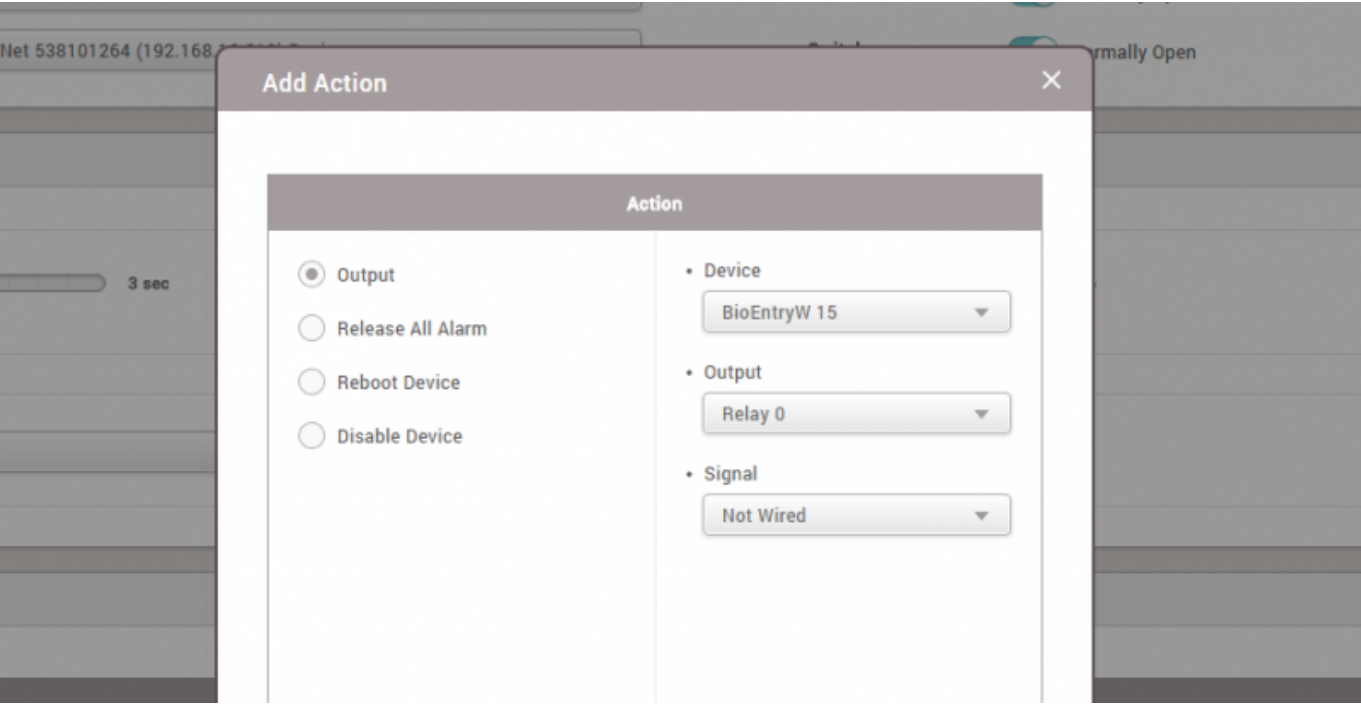


4. 1 15 가 .

5. 가 .

6. .

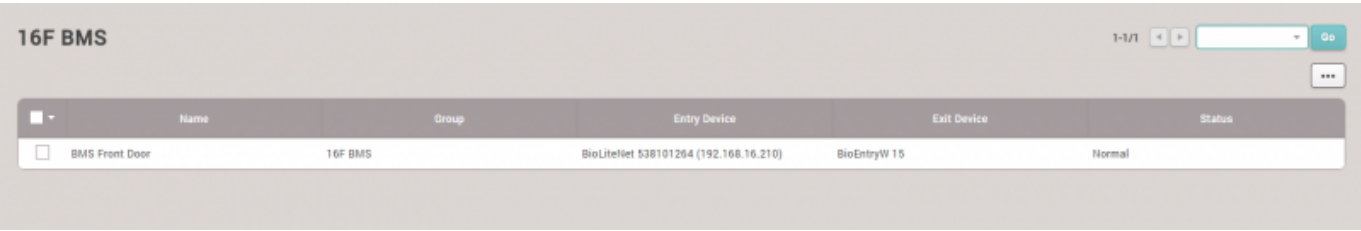

7. .

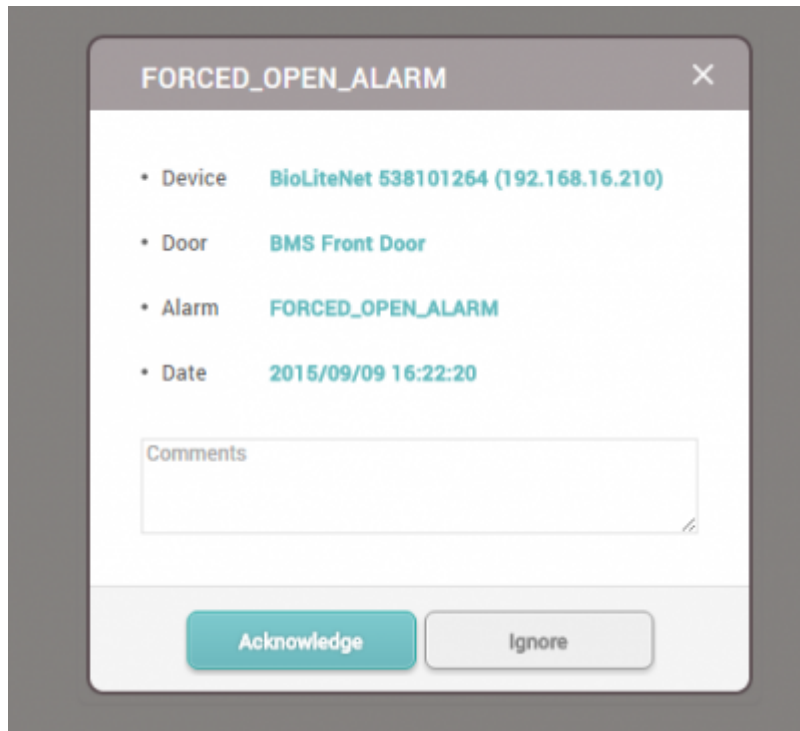

[add\\_devices2.mp4](#)

From:  
<https://kb.supremainc.com/knowledge/> -

Permanent link:  
[https://kb.supremainc.com/knowledge/doku.php?id=ko:how\\_to\\_make\\_doors](https://kb.supremainc.com/knowledge/doku.php?id=ko:how_to_make_doors)

Last update: **2017/01/09 09:34**