


.....	1
.....	1
.....	2

	RF	● BS3-DB: 125kHz EM & 13.56MHz MIFARE, MIFARE Plus, DESFire, DESFire EV1/EV2/EV3¹⁾, FeliCa ● BS3-APWB: 125kHz EM, HID Prox & 13.56MHz MIFARE, MIFARE Plus, DESFire, DESFire EV1/EV2/EV3²⁾, FeliCa, iCLASS SE/SR/Seos
	RF ³⁾	EM/HID Prox/MIFARE/DESFire/HID iCLASS: 30 mm, FeliCa: 15 mm
		NFC, BLE
	QR	
	CPU	1.5GHz Quad Core
		32GB Flash + 4GB RAM
	LCD	5.5" IPS LCD
	LCD	720 x 1280
		16bit
		-20°C ~ 50°C
		-40°C ~ 70°C
		0% ~ 80%,
		0% ~ 90%,
		2MP 2EA
	(W x H x D)	82.5 x 171 x 23.4 (mm)
		● - BS3-DB: 370 g - BS3-APWB: 380 g ● : 90 g ()
	IP	IP65
	IK	IK06
		CE, FCC, IC, KC, RoHS, REACH, WEEE, UKCA, RCM
		0.6 ~ 1.0 m
		1.4 ~ 1.9 m
		0.3

		100,000 ⁴⁾
	(1:N)	● : 50,000
	(1:1)	● : 100,000 ● : 100,000 ● PIN: 100,000
		5,000,000
		50,000
		(10/100/1000 Mbps, MDI/MDI-X)
	Wi-Fi	● BS3-DB: ● BS3-APWB: (802.11 b/ g/ n 2.4GHz)
	RS-485	1 / (가)
	Wiegand	1 , 1
	TTL	3
		1
	PoE+	● BS3-DB: ● BS3-APWB: (IEEE 802.3at compliant)
	RTSP	
	USB	USB 2.0 (Host)
	USB	
		DC 12 V (: 2.5 A) DC 24 V (:1.2 A)
	VIH	: 3V / : 5V
	VIL	: 1V
		4.7 kΩ (4.7 kΩ .)
	Wiegand VOH	4.8V
	Wiegand VOL	0.2 V
	Wiegand	1 kΩ
		2 A @ 30 VDC Resistive load 1 A @ 30 VDC Inductive load

(: mm)

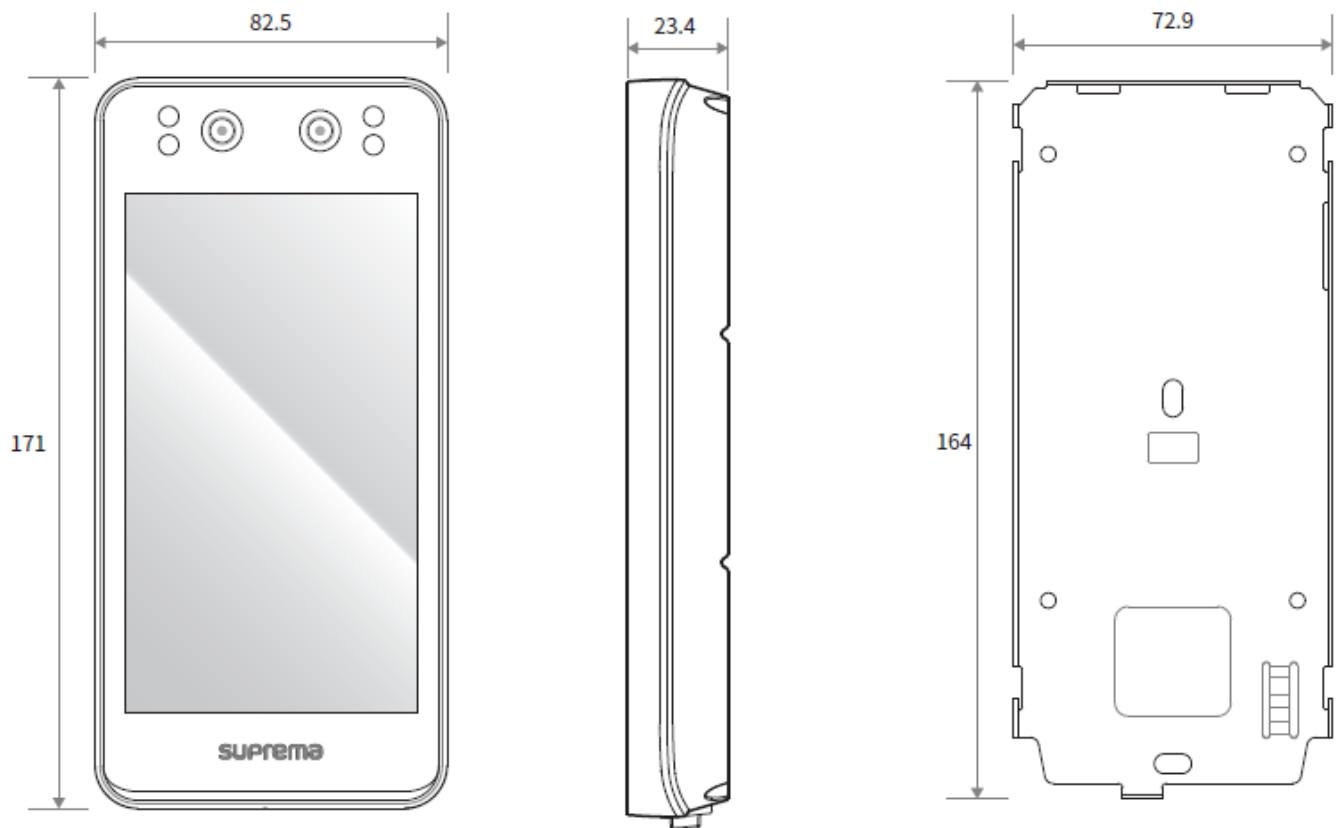

1) 2)

DESFire EV2/EV3

DESFire EV1

, DESFire EV1

CSN

3)

RF

4)

From:

<https://kb.supremainc.com/knowledge/> -

Permanent link:

https://kb.supremainc.com/knowledge/doku.php?id=ko:product_specification_dimensions

Last update: **2022/10/18 13:12**