

**BS2\_CheckGlobalAPBViolationByDoorOpen** ..... 1  
..... 1  
..... 1  
..... 1  
..... 1


# BS2\_CheckGlobalAPBViolationByDoorOpen

[+ 2.7.0]

```
#include "BS_API.h"


int BS2_CheckGlobalAPBViolationByDoorOpen(void* context, uint32_t deviceId,
uint16_t seq, int handleResult, uint32_t zoneID);
```

- [In] *context* : Context
- [In] *deviceId* :
- [In] *seq* :
- [In] *handleResult* : (BS\_SDK\_SUCCESS or BS\_SDK\_ERROR\_XXX)
- [In] *zoneID* : id

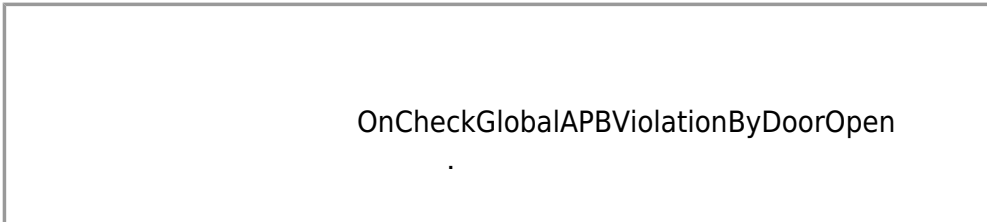

BS\_SDK\_SUCCESS , 가

## [BS2\\_SetGlobalAPBViolationByDoorOpenHandler](#)



From:

<http://kb.supremainc.com/bs2sdk/> - **BioStar 2 Device SDK**

Permanent link:

[http://kb.supremainc.com/bs2sdk/doku.php?id=ko:bs2\\_checkglobalapbviolationbydooropen](http://kb.supremainc.com/bs2sdk/doku.php?id=ko:bs2_checkglobalapbviolationbydooropen)

Last update: **2020/08/07 12:38**