

BS2_GetSlaveDevice 1
..... 1
..... 1
..... 1
..... 1

BS2_GetSlaveDevice


RS485

```
#include "BS_API.h"

int BS2_GetSlaveDevice(void* context, uint32_t deviceId,
BS2Rs485SlaveDevice** slaveDeviceObj, uint32_t* slaveDeviceCount);
```

[BS2Rs485SlaveDevice](#)

- [In] *context* : Context
- [In] *deviceId* :
- [Out] *slaveDeviceObj* : slave device
- [Out] *slaveDeviceCount* : slave device

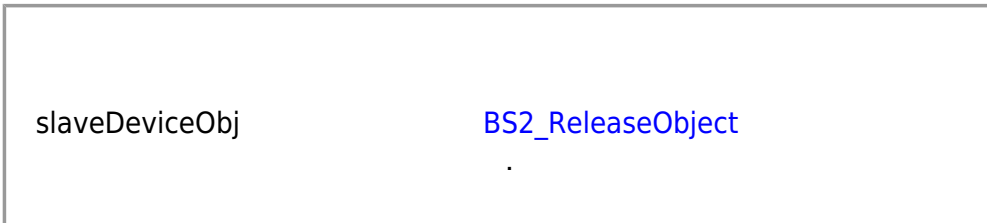

BS_SDK_SUCCESS , 가

[BS2_SetSlaveDevice](#)

From:

<http://kb.supremainc.com/bs2sdk/> - **BioStar 2 Device SDK**

Permanent link:

http://kb.supremainc.com/bs2sdk./doku.php?id=ko:bs2_getslavedevice

Last update: **2016/07/12 09:33**