

| | |
|-------|---|
| | 1 |
| | 1 |
| | 4 |
| | 4 |

, BioStar 2,

BioStar 2.5

가

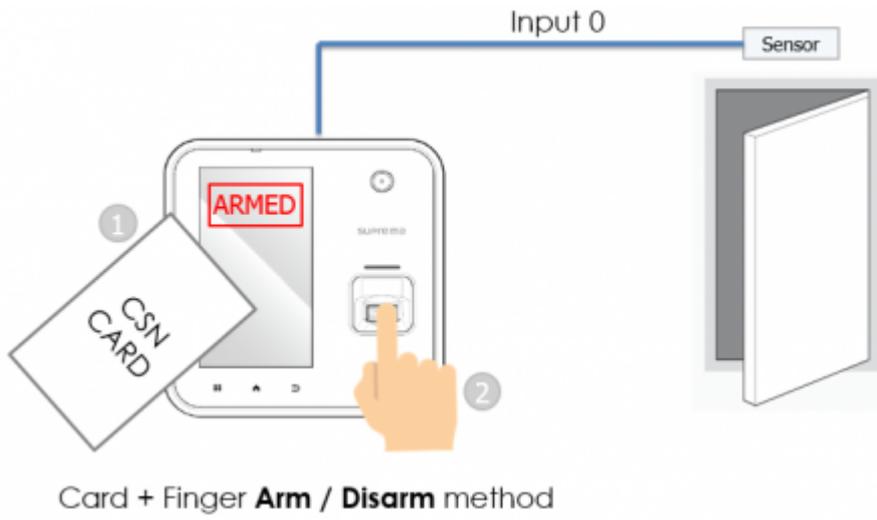

RS-485

가

Knowledge Base


가
가

1. BioStar 2 가

2. 가


3. (ZONE)

4. 가(ADD ZONE)

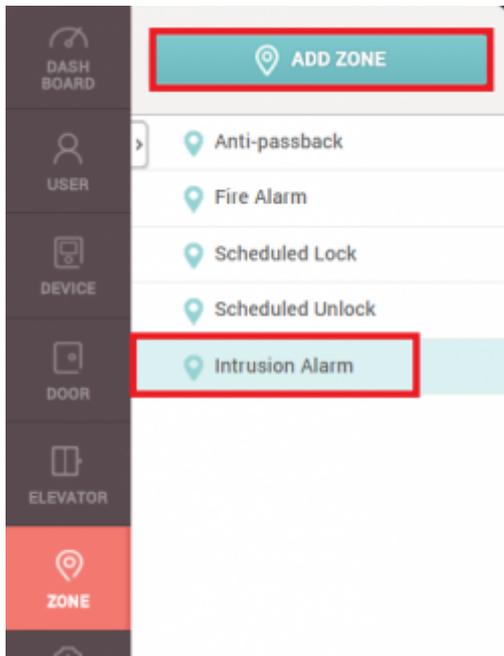

4. (ZONE) BioStar 2 AC Standard 가 .

5. (Intrusion Alarm) (Apply) .

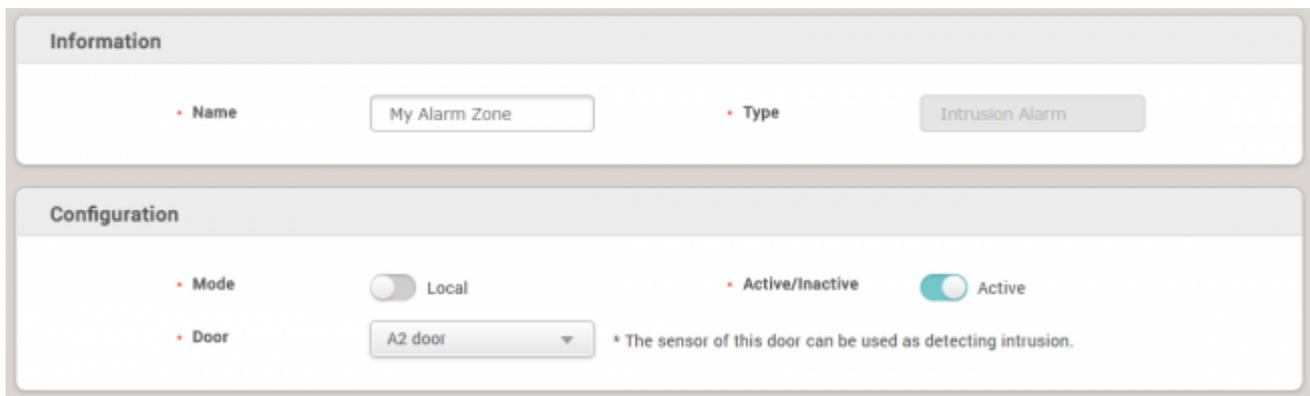

6. (Name) .

BioStar 2.5 (RS-485) .

7. (Door) .

8. (Active) .

9. (Delay Time) .

: () .
 : () (Intrusion alarm)

detected)

10. / + 가(+ Add)

1. : 128 / CSN/Wiegand

2. : 가 가

- A2: LCD

- BioStation 2, BioStation L2: 1 F1 1 F2

3. : /

11. / / (Access Group) 128

Arm / Disarm Setting

• Delay Time Arm s Disarm s

• Access Card

| Card Type | Card ID | |
|-----------|-------------|--|
| CSN | ID: 1256... | |

+ Add

• Access Group

• Arm/Disarm Setting (Device)

| Device | Door | Entry / Exit | Arm Type | Input Type | |
|--|---------|--------------|--------------|-------------|--|
| BioStation A2 939254397 (192.168.14.109) | A2 door | Entry | Arm / Disarm | Card or Key | |

+ Add

• Arm/Disarm Setting (Input)

| Device / Input | Arm Type | Summary | |
|----------------|----------|---------|--|
| | | | |

+ Add

12. + 가(+ Add)


Intrusion Setting

• Detect Intrusion

| Device / Input | Summary | |
|---|----------|--|
| Input Port 0 of BioStation A2 939254397 (192.168.14.109) Device | N/O, 5ms | |

+ Add

13. + 가(+ Add)

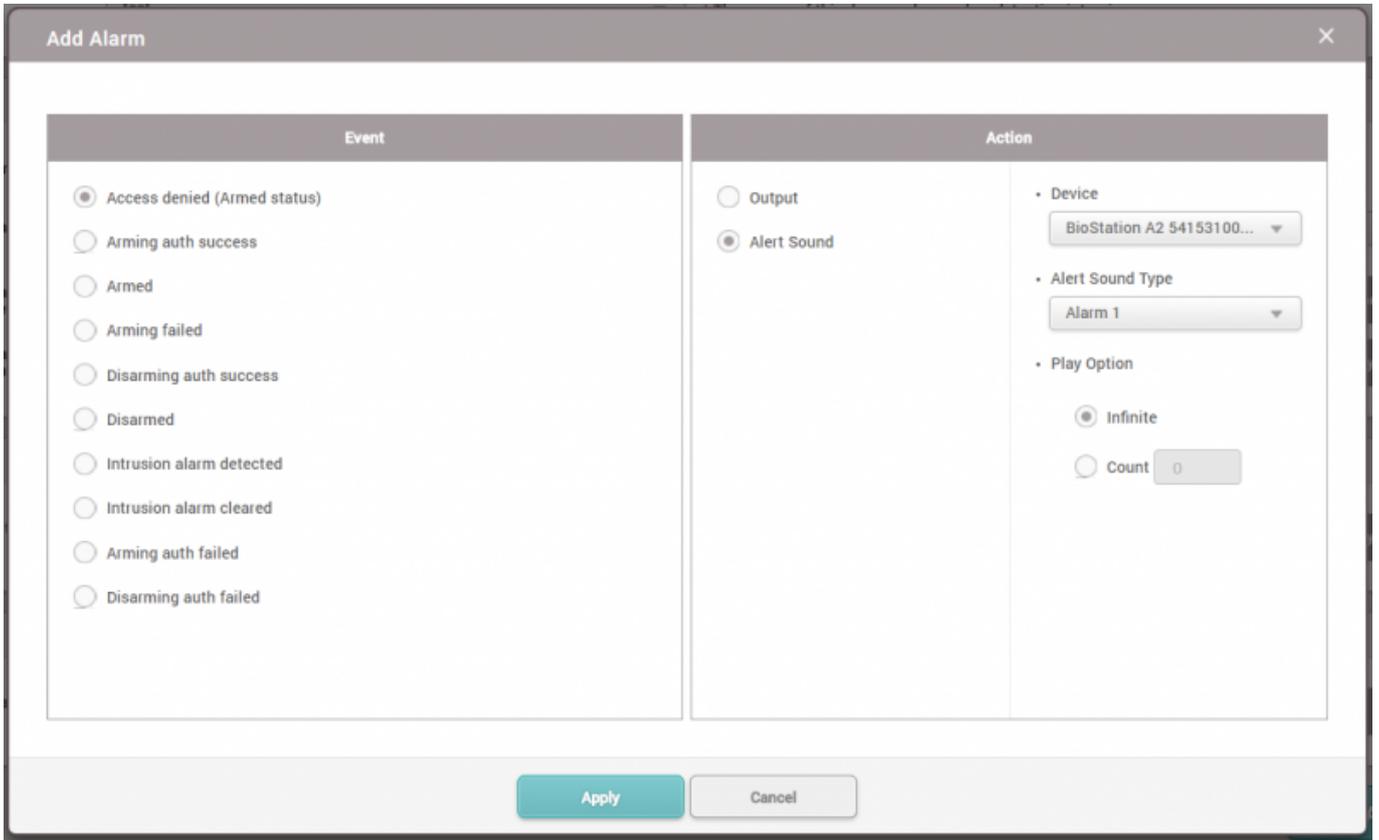

(Device Status) **(Alert Sound)** **(MONITORING) >**
 (Clear Alarm)

BioStation A2 가
 가 , 가 . 가
[2x_sysconfig_a2_alarm_final.mp4](#)

(MONITORING) **(Zone Status)**
 BioStar 2

BioStar 2.5

- BioStation 2 FW 1.5.0
- BioStation A2 FW 1.4.0
- CoreStation FW 1.0.0

- P2 FW 1.0.0
- R2 FW 1.0.0

BioStar 2.6

- BioStation L2 FW 1.3.0 or above - W2 FW 1.2.0 or above - FaceStation 2 FW 1.1.0 or above

Entry

From:

<https://kb.supremainc.com/knowledge/> -

Permanent link:

https://kb.supremainc.com/knowledge/doku.php?id=ko:how_to_configure_an_alarm_zone

Last update: **2018/07/20 14:29**