

BioStar 2 1
BioStar 2 vs BioStar 1 1
 - / 1
 / 2
 3

, BioStar 2

BioStar 2

BioStar 2 vs BioStar 1

BioStar 2 BioStar 1.x

			BioStar 1.x	BioStar 2.x
	/		/	
	RS 485	/		
	Supervised Input	DM-20 Supervised Input		DM-20
		/		
				가
				=

- /

BioStar 1.x

가

가

가

가

가

가

BioStar 2

→

.


,

가

→

가

→

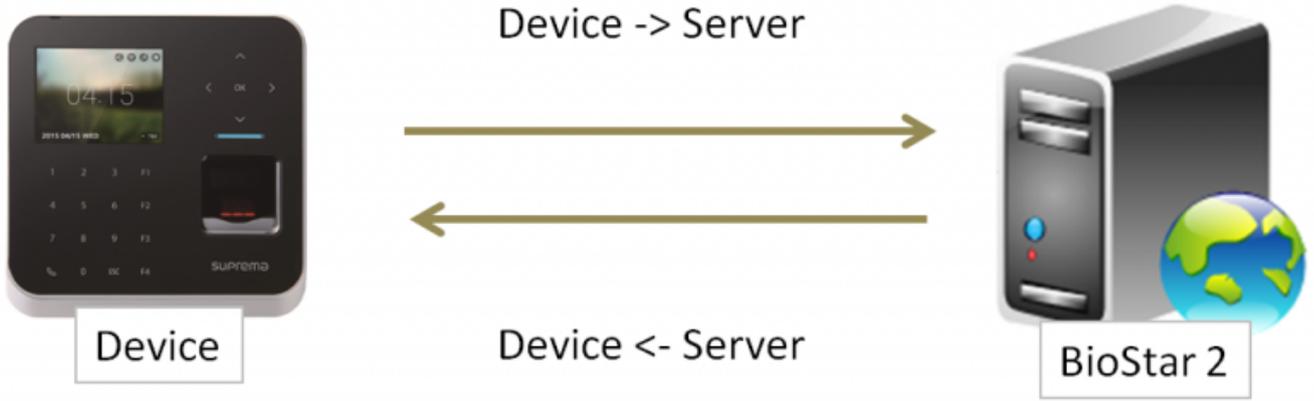

Function	BioStar 1.x		BioStar 2	
	Direct	Server	Device -> Server	Server -> Device
Mode	Direct	Server	Device -> Server	Server -> Device
Realtime log update	Only to Client	○	○	○
Auto Reconnect	X	○	○	○

IP가 " → " .

/

BioStar 1.x

가

RS-485

가 ,

BioStar 2


가

, ,

, ,

가 31


, 8

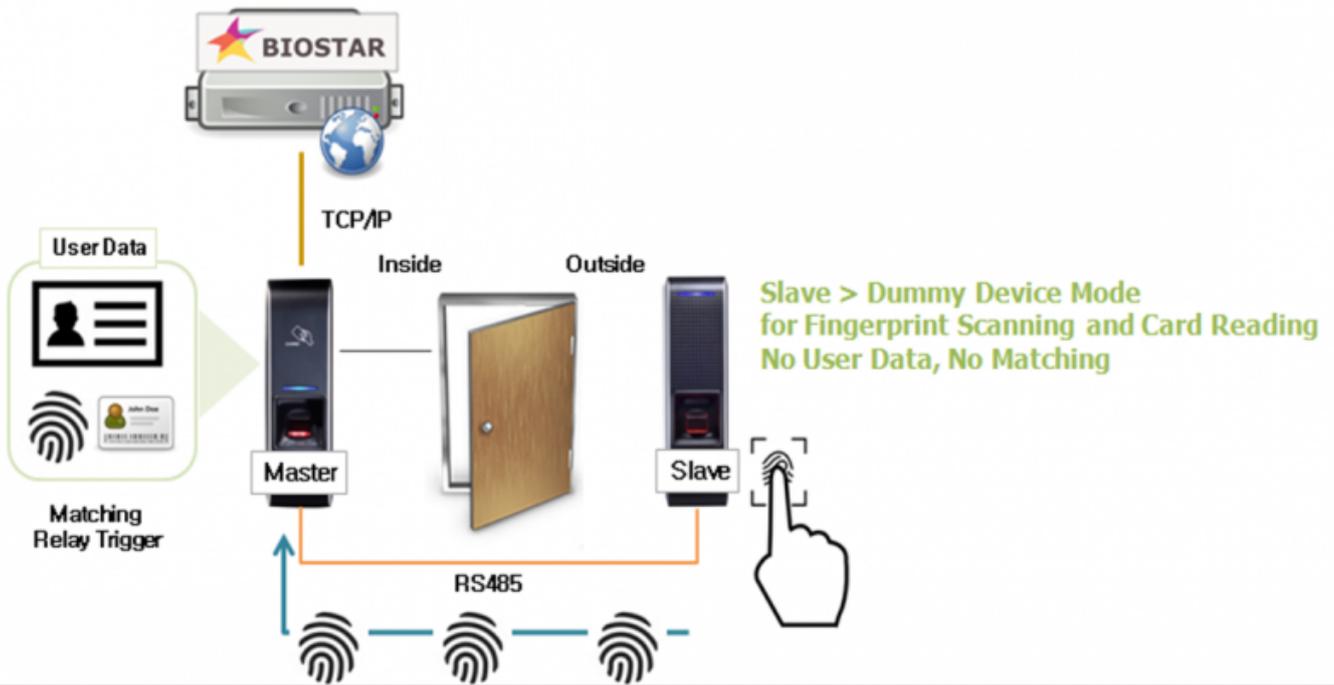

BioStar 2

+

16

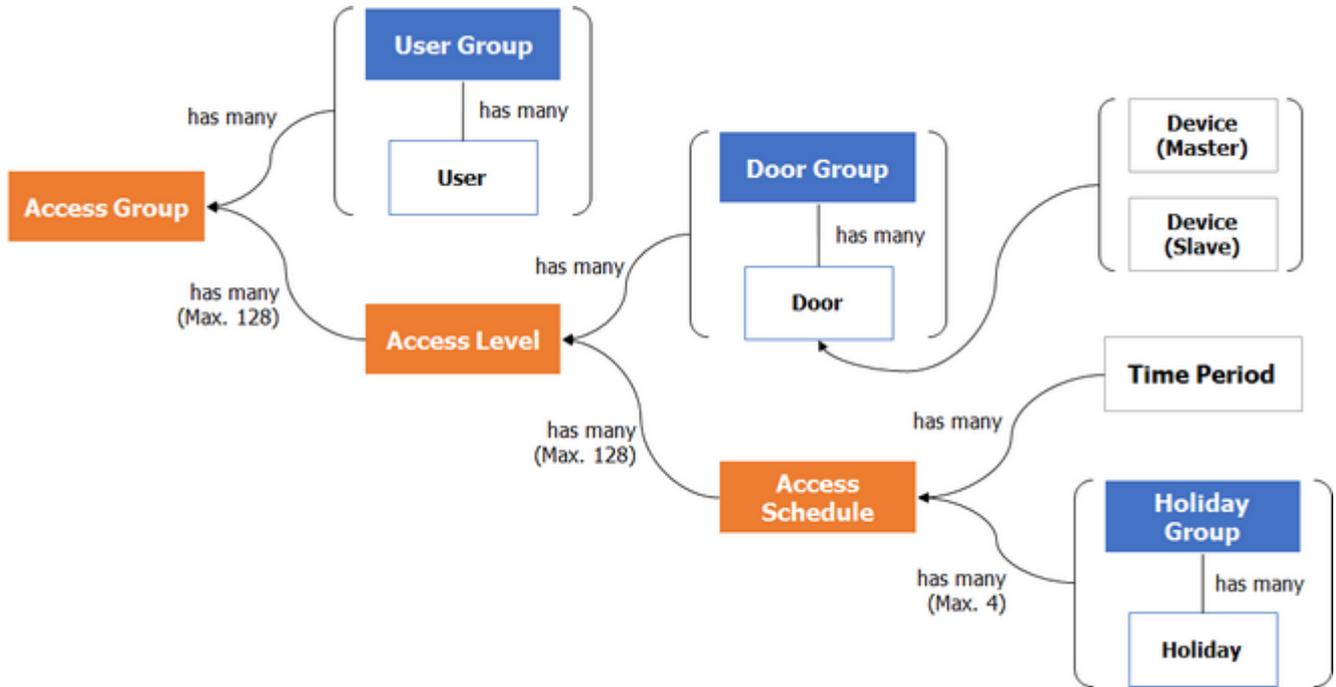

	BioStar 1.x	BioStar 2.x
/	4	16
/	32	128 x

가

-
- VIP (APB)

From: <http://kb.supremainc.com/knowledge/> -

Permanent link: http://kb.supremainc.com/knowledge/doku.php?id=ko:what_is_different_with_biostar_2

Last update: **2016/12/30 10:28**