


Table of Contents

How to configure Trigger and Action on Setting	1
Available Triggers	1
Setting Up a Custom Signal Output	2
Setting Up an Email Alert on BioStar	4

[System Configuration](#), [BioStar 2](#), [Trigger and Action](#), [Alert](#), [Setting](#)

How to configure Trigger and Action on Setting

The trigger & action feature is used when you would like to send a custom output signal from a device or send an email to the administrator based on the occurrence of an alarm event. For instance, you can use this feature to trigger your alarm lamp when a forced door open alarm goes on. The system will simultaneously send an email to the administrator as well.

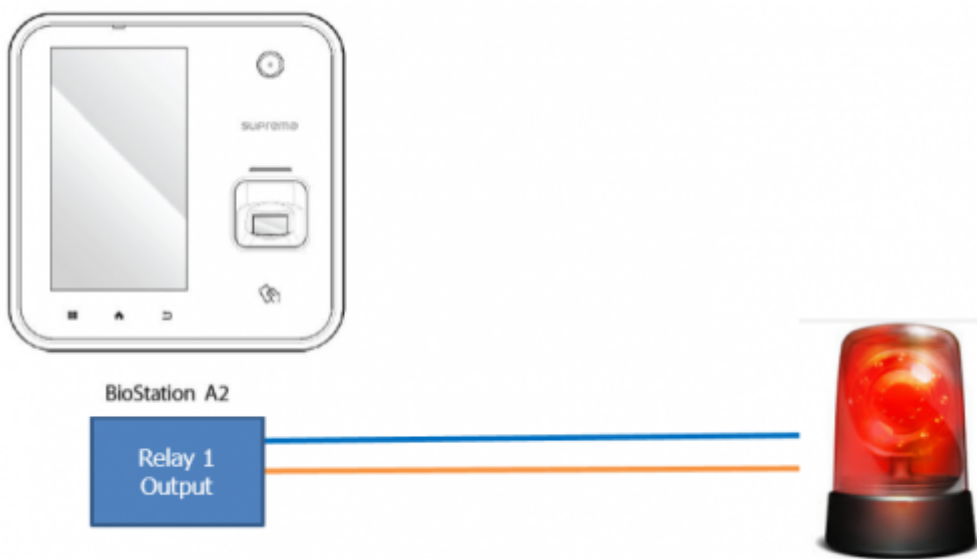

Available Triggers

Below is the full list of events that are available for triggers on the setting menu.
Available events for Device:

- Supervised Input (Open)
- Supervised Input (Short)
- Tamper On
- RS-485 disconnected
- Device restarted

Supervised Input is used with a DM20. Please refer to [DM-20 Wiring Examples](#) for more information.

Available events for Door:

- Held door open alarmed
- Forced door open alarmed
- Held door opened

- Forced door opened


Available events for Zone:

- Scheduled lock zone alarm detected
- Fire alarm zone alarm detected
- Anti-passback zone alarm detected

Setting Up a Custom Signal Output

In the scenario below, we will send a custom signal from our A2 when there is a forced open event.

1. Click **Setting > TRIGGER & ACTION**.

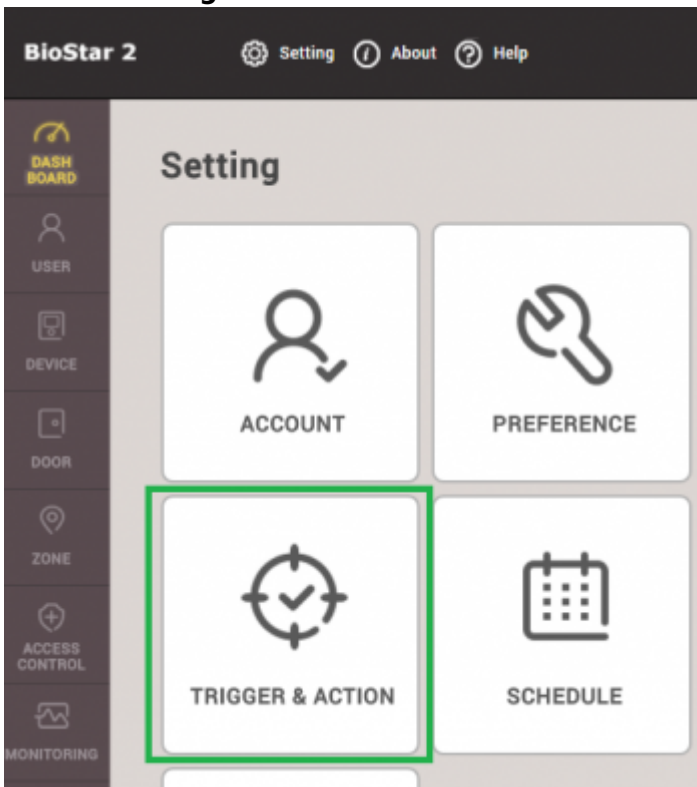


2. Click **ADD TRIGGER & ACTION**.




3. Enter a name for this trigger on the **Name** textbox.


4. Click on the schedule drop box. Click **+ Add Schedule**. If you have a preconfigured schedule, you can use that one by selecting it.

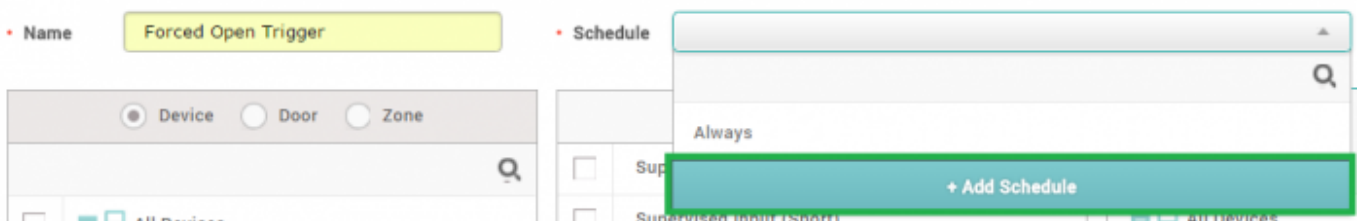

5. Configure the schedule as necessary and click **Ok**. In this case, I would like the trigger to be on all day except for Sunday.

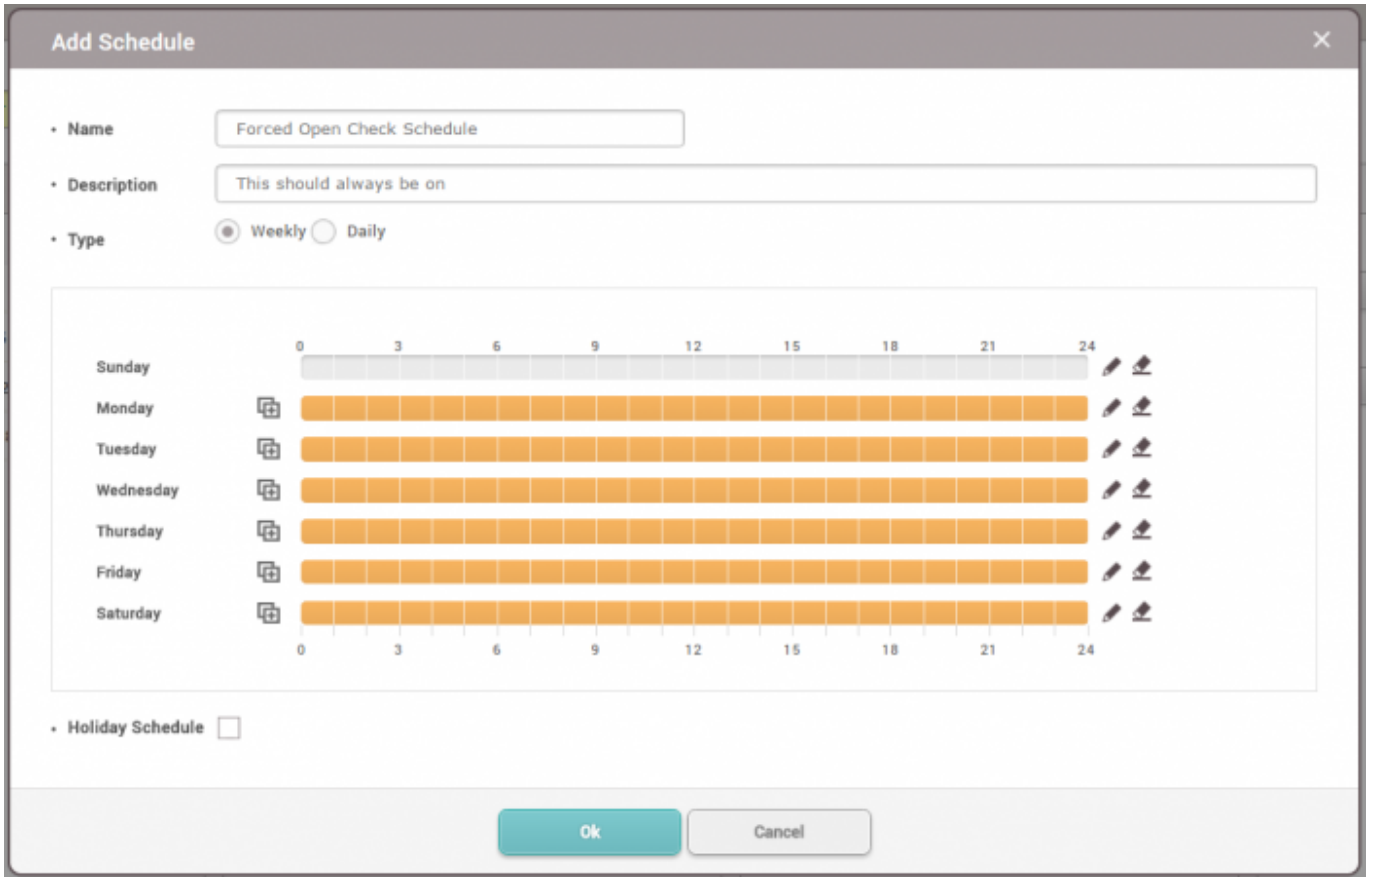

- 6. Now select the newly created schedule on the **Schedule** drop box.
- 7. Select the **Door** radio button.
- 8. Select the door this will affect. The A2 is installed on Door 3 in this example.
- 9. Check **Forced door opened**.
- 10. Select your device (A2).
- 11. Relay 0 is already used for the door lock so relay 1 will be used for the output.

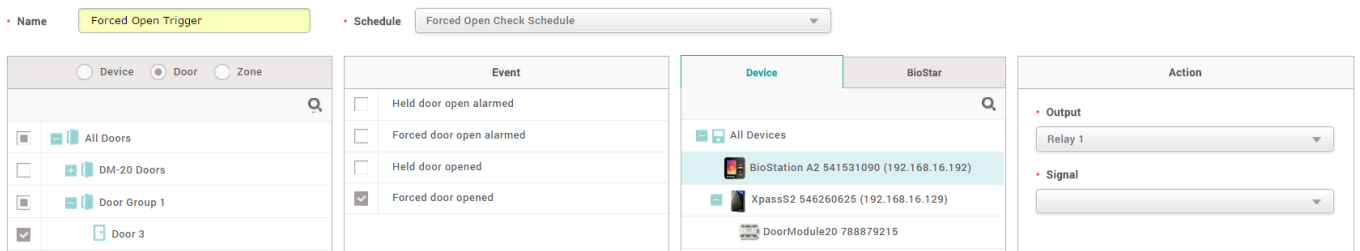

- 12. Click on the **Signal** drop down box.
- 13. Click **Add Signal**.
- 14. Fill in the details as desired and click **Apply**.



15. Click on the **Signal** drop box and select the signal you just created and click **Apply**.


16. Now when there is a forced door open event, the custom signal is sent to relay 1.

The screenshot shows a "Real-time Log" interface. At the top, there are controls for "Save Filter", "Pause", "Clear", and a menu icon. Below is a table with columns: Date, Door, Device ID, Device, User, Zone, Event, and View. The second row is highlighted in red and contains the event "Forced door opened".

Date	Door	Device ID	Device	User	Zone	Event	View
2016/08/03 14:54:01	Door 3	541531090	BioStation A2 ...			Door closed	
2016/08/03 14:53:59	Door 3	541531090	BioStation A2 ...			Forced door opened	

Setting Up an Email Alert on BioStar

1. Click **Setting > TRIGGER & ACTION**.
2. Click on your desired trigger.
3. On Device / BioStar tab, click **BioStar** and check **BioStar**.

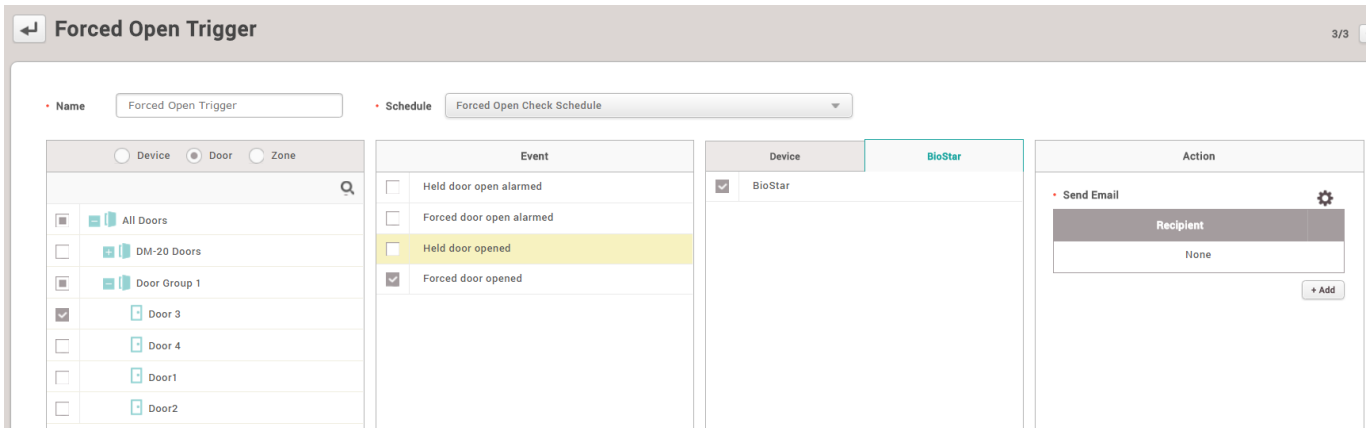

4. Click on the Gear icon on the action tab to setup your email.



5. Set up your SMTP. If you are not sure what the settings are, please ask your IT administrator.

SMTP Option

Sender Information

- SMTP Server Name: Ethan admin email
- Description: gmail
- Server Address: smtp.gmail.com
- Port(default:25): 465
- User Name: ethan@suprema.co.kr
- Password: •
- Security Type: SSL
- Sender: ethan@suprema.co.kr

Apply Cancel

6. Add a **Recipient** and click **Apply**.

Action

• **Send Email**

Recipient

ethan@suprema.co.kr

Ok

+ Add

7. Now create a forced door open event.

Date	Door	Device ID	Device	User	Zone	
2016/08/08 17:20:51	Door 3	541531090	BioStation A2 ...			Door closed
2016/08/08 17:20:51	Door 3	541531090	BioStation A2 ...			Door locked
2016/08/08 17:20:51	Door 3	541531090	BioStation A2 ...			Held door opened
2016/08/08 17:20:48	Door 3	541531090	BioStation A2 ...			Forced door opened

8. The administrator will receive an alert email.

[BioStar Alert] Forced door opened

받은편지함 x

Sent to Me x



Biostar Alarm Manager <ethan@suprema.co.kr>

나에게 ▾

Datetime: 2016-08-08 08:20:48(+00:00)

Server Datetime: 2016-08-08 17:19:35

Event: Forced door opened

Device ID: 541531090

Device Name: BioStation A2 541531090 (192.168.16.192)

Door: 15

Door Name: Door 3

From:

<https://kb.supremainc.com/knowledge/> -

Permanent link:

https://kb.supremainc.com/knowledge/doku.php?id=en:how_to_configure_trigger_and_action&rev=1470727598

Last update: **2016/08/09 16:26**