Table of Contents

Image Log Storage Path and Auto Saving		1
--	--	---

Image Log Storage Path and Auto Saving

Starting from BioStar2 version2.7.2, user can pre-configure the image log storage path and autosaving without having to view or check logs from the monitoring menu.

- 1. Configure the image log storage path.
- Log in to BioStar 2 \rightarrow Settings \rightarrow Image Log \rightarrow Storage Path Settings

BioStar	2	🛞 Settings 🖁 Port	t 🕧 About 🥐 Help			
Dash Board	•	Settings				
USER DEVICE DOOR		Q, account	PREFERENCE	CARD	CARD FORMAT	SERVER
ELEVATOR O ZONE CONTROL		TRIGGER & ACTION	SCHEDULE	ALERT	HTTPS	CLOUD
		R= IMAGE LOG	USB AGENT	FACE GROUP MATCHING	AUDIT TRAIL	VIDEO
TIME		DAYLIGHT SAVING TIME	SECURITY	ACTIVE DIRECTORY		

• Configure the image log file path as below. Default value is '.\imagelog\'.

• Some of symbols (/, *, ?, ", <, >, |) cannot be supported to set image log file path.

Storage Path Settings	
 Image Log File Path 	.\imagelog\

- 2. Enable image log feature from the device.
- Register the device on your device list.
- Go to 'Device → (Selected Device) → advanced → Image Log → enable 'Image Log' → click 'Apply' button on the bottom.

 Configuration 	Event		Schedule		
	1:1 authentication succeeded	Ŧ	Always	Ŧ	Ŵ
	1:1 authentication failed	Ŧ	Always	Ŧ	Ŵ
	1:N authentication succeeded	Ŧ	Always	Ŧ	Ŵ
	1:N authentication failed	Ŧ	Always	Ŧ	Ŵ
	Dual authentication succeeded	Ŧ	Always	Ŧ	÷.
	Dual authentication failed	∇	Always	Ŧ	Ŵ
	Authentication failed	Ŧ	Always	Ŧ	Ŵ
	Access denied		Always		÷.


- Image log requires picture taking; not all SUPREMA devices support the image log feature. If your device has a camera for facial authentication, you can use the image log feature guided as below.
- 3. Check your image log saved correctly.
- Go to 'Monitoring \rightarrow Real-time Log.

• Shown below sample: configure to save an image log when 1:1 authentication succeeded.

Go through the card authentication process and check the image log saved on the left below.

DASH BOARD							Administrator
C C C C C C C C C C C C C C C C C C C	Real-time Log T Save Filter Date 2019/05/20 17:51:15	Door Y Elevator Y	Device T FaceStation 2 S((magelog)	User T	Zone T:1 authentication s	LI Pause Event acceeded (Card)	

- When the image log is captured, the image automatically gets saved in image log file path which you configured in Settings → Image Log → Storage Path Settings'.
- Following sample is configured as '.\imagelog\'. Image file is saved under the '(device ID) folder'.

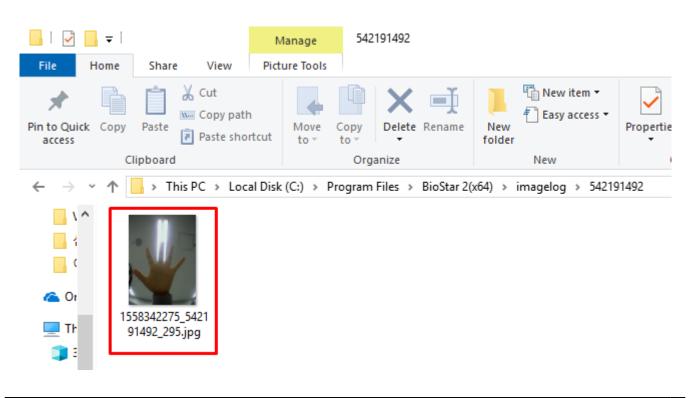

- 4. Image log auto saving without viewing or checking logs from the monitoring.
- Even though your device is not connected to BioStar 2 server, or you were not checking all image logs through the monitoring page, image logs are saved automatically.
- Case 1: did not check the image log, the log will be saved at the image log file path: If your device is connected with BioStar 2, but you did not check the image log, the log will be saved at the image log file path which you configured in Settings → Image Log → Storage Path Settings.
- Case 2: If your device is not connected with BioStar 2, image logs will be stored in the device and will be automatically saved at the image log file path.

 Your device saved the image log when specific events happened, such as 1:1 authentication succeed, 1:N authentication succeed, etc.

2) You need to add your device on your device tree.

BioStar	2 🛞 Settings 🗗 Port ()	About ?	Help						
DASH BOARD		All D	evices						
8	Q ADVANCED SEARCH	Searc	h Device						×
USER	🗖 🛃 All Devices								
	BioEntry W2 544108750 (1	Found	d 17 device(s)	. 5 device(s) have invalid IP addres	ses.				Search
	🜄 Waiting Device		Device ID	Name	Group	Device Type (Master/Slave)	IP Address	Status	Secure Mode Status
DOOR	USB Device		547633676	BioStation 2 547633676 (1 🖋	All Devices 🔻	BioStation 2 M	192.168.16.228	ОК	Connectable.
₽			542342499	FaceStation 2 542342499 (🖋	All Devices 💌	FaceStation 2	192.168.16.218	ок	Connectable.
ELEVATOR			542191492	FaceStation 2 542191492 (🖋	All Devices 🔻	FaceStation 2	192.168.16.196	ОК	Connectable.
© ZONE			542070079	CoreStation 40 542070079 🖋	All Devices 🔻	CoreStation 40 M	192.168.16.225	ОК	Connectable.
(+) ACCESS CONTROL			541530984	BioStation A2 541530984 (🖋	All Devices 🔻	BioStation A2	192.168.16.194	ОК	Connectable.
			541531061	BioStation A2 541531061 (🖋	All Devices 💌	BioStation A2	192.168.16.212	ок	Connectable.
			544108121	BioEntry W2 544108121 (1 🖋	All Devices 🔻	BioEntry W2	192.168.16.202	ОК	Connectable.
			Set IP					Add	Close


3) Sync your device with BioStar 2 server. If your device does not get a sync, please do manually as below.

2024/09/10 04:02

5/6

BioStar	2 🛞 Settings 💆 Port () Abou	# (?) H	telp									Administrator
DASH BOARD	SEARCH DEVICE	A	All D	evices							H 4 1	1 🕨 🖻 50 rows 💌	Go
8	Q ADVANCED SEARCH						0		connect	C Sync Device	🏖 Manage Users in De	vice 1 Firmware Upgrade	Telete Device
USER	🚍 🔜 All Devices		••	Device ID	Name		Group			Device Type Master/Slave)	IP Address	Device Status	Firmware Status
	BioEntry W2 544108750 (1	10		544108750	BioEntry W2 544108750 (192.168.16.199)	All Devices			BioEntry		192.168.16.199	Disconnected	_
	FaceStation 2 542191492 (542191492	FaceStation 2 542191492 (192.168.16.196)	All Devices			FaceStati		192.168.16.196	Normal	
DOOR	🕞 Waiting Device		-	542151452	Tacestation 2 342131432 (132.100.10.130)	All Devices			TaceStati	011 2	192.100.10.190	Norma	
	🗟 USB Device												
ELEVATOR													

4) When device gets in sync, check the saved image logs as below. (Image log in the blue box is the old one, and in the red box is the new one.)

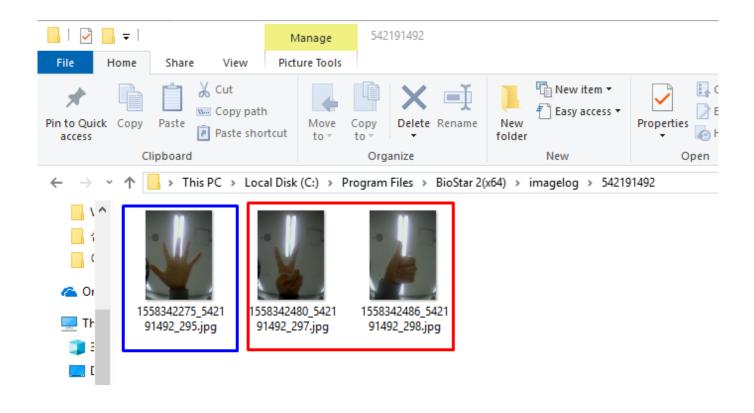

• Capability limitations of saved image logs is different for each device. Please double-check and confirm the limitation of your device from the User Guide Manual.

From: https://kb.supremainc.com/knowledge/ -

Permanent link: https://kb.supremainc.com/knowledge/doku.php?id=en:image_log_storage_path_and_auto_saving

Last update: 2023/08/01 16:56

- https://kb.supremainc.com/knowledge/