

## How to Use the Quick Action

A new addition to the **TRIGGER & ACTION** menu, **Quick Action** allows you to quickly control the operation of the door in an emergency situation.

By adding the **Quick Action** button in the **CUSTOM INTERFACE** menu, you gain the ability to conveniently control multiple doors simultaneously. Simply click the **Quick Action** button on the BioStar 2 main screen to initiate the command.

### Adding the Trigger & Action to Use as Quick Action

- 1 Click **Settings** → **TRIGGER & ACTION**.
- 2 Click **ADD TRIGGER & ACTION**, and then set each item to add the desired action.

► The image above is an example screen and may differ from the actual screen.


- 3 Select Schedule to **Always**, check **Use as Quick Action**, and then click **Apply** to save settings.



- **Quick Action** is only available when the **Schedule** is **Always**.
- By selecting **Use as Quick Action**, you can create an action without the need to specify an **Event**.


# Adding the Quick Action Button to the BioStar 2 Main Screen

- 1 Click **Settings** → **CUSTOM INTERFACE**.
- 2 In the **Quick Action Layout**, click **+ Add** to enter and select each item.

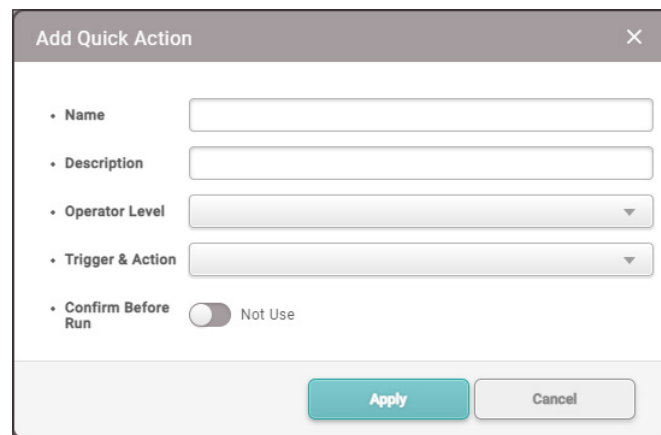

► The image above is an example screen and may differ from the actual screen.

- **Operator Level:** Select the **Operator Level** that can run the added **Quick Action**. You can select multiple options.
  - **Trigger & Action:** Select the **Trigger & Action** to run. You can select multiple options.
  - **Confirm Before Run:** Enabling this option prompts a confirmation pop-up when pressing the **Quick Action** button on the main screen, asking whether to proceed with running the **Quick Action**.
- 3 Click **Apply** to save the settings.
  - 4 Click **Apply** on the **Custom Interface** screen. Check the confirmation pop-up and click **Yes**. The **Quick Action** button added to the top bar of BioStar 2 will be created.




► The image above is an example screen and may differ from the actual screen.




- Up to 4 **Quick Action** buttons can be added to the top bar of the main screen.
- The **Quick Action** button that appears may vary depending on the **Operator Level** set for the user.

- 5 Clicking the **Quick Action** button, created on the top bar of the main screen, will execute the predefined actions set in **TRIGGER & ACTION**.

# Editing the Quick Action Buttons


- 1 Click **Settings** → **CUSTOM INTERFACE**.
- 2 Click the  icon in the right column of the Quick Action button to edit, then edit the desired part and click **Apply**.

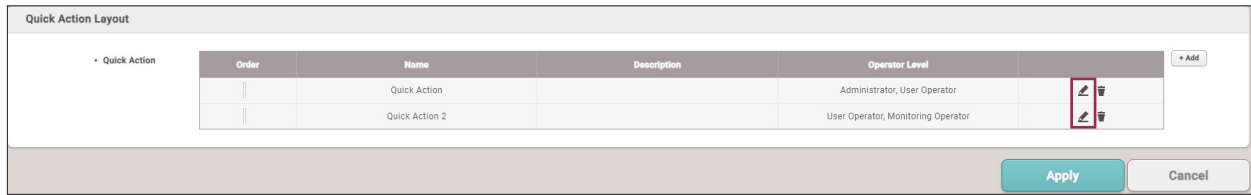


► The image above is an example screen and may differ from the actual screen.

- 3 Click **Apply** on the **Custom Interface** screen. Check the pop-up and click **Yes** to apply the modifications.

# Deleting the Quick Action Button

- 1 Click **Settings** → **CUSTOM INTERFACE**.
- 2 Click the  icon in the right column of the Quick Action button to delete.

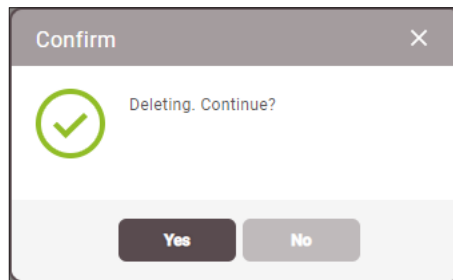

► The image above is an example screen and may differ from the actual screen.

- 3 Check the deletion confirmation pop-up and click **Yes**.
- 4 Click **Apply** on the **Custom Interface** screen. Check the pop-up and click **Yes** to apply the deletion.