

BS2_RemoveAuthOperatorLevelEx 1
..... 1
..... 1
..... 1
..... 1

Device API > [BS2_RemoveAuthOperatorLevelEx](#)

BS2_RemoveAuthOperatorLevelEx

[+ 2.6.3] userIDs


[BS2_SetAuthConfig](#), [BS2_GetAuthConfig](#)

10

가

1000

가

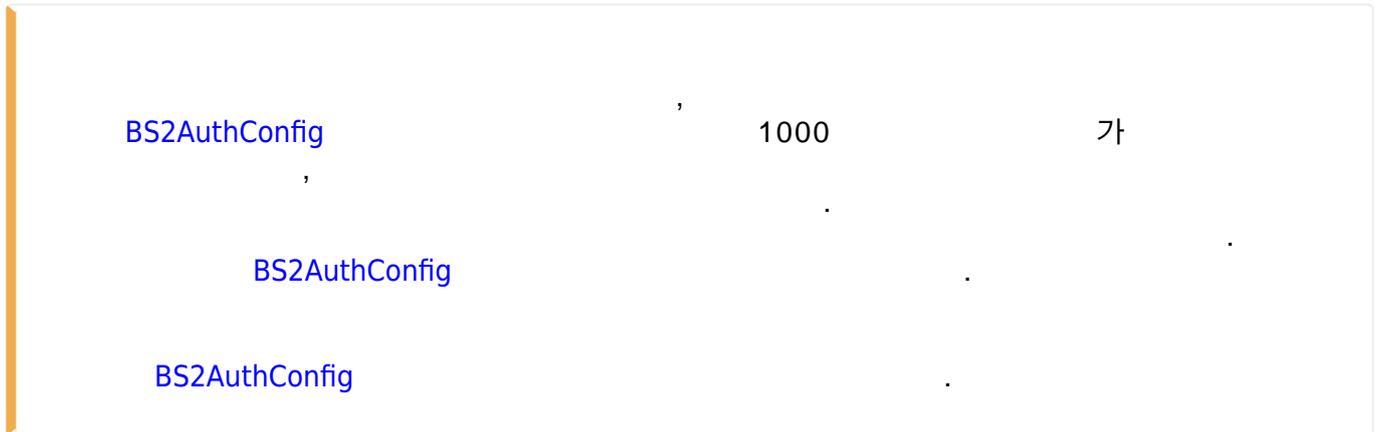

```
#include "BS_API.h"
```

```
int BS2_RemoveAuthOperatorLevelEx(void* context, BS2_DEVICE_ID deviceId,
BS2_USER_ID* userIDs, uint32_t userIDCount);
```

- [In] *context* : Context
- [In] *deviceId* :
- [In] *userIDs* :
- [In] *userIDCount* :

BS_SDK_SUCCESS

, 가

[BS2_GetAuthOperatorLevelEx](#)
[BS2_GetAllAuthOperatorLevelEx](#)

[BS2_SetAuthOperatorLevelEx](#)
[BS2_RemoveAuthOperatorLevelEx](#)
[BS2_RemoveAllAuthOperatorLevelEx](#)

From:

<https://kb.supremainc.com/bs2sdk/> - **BioStar Device SDK**

Permanent link:

https://kb.supremainc.com/bs2sdk./doku.php?id=ko:bs2_removeauthoperatorlevelex

Last update: **2023/08/17 13:44**