


BS2_EnrollUserEx 1
..... 1
..... 1
..... 1
..... 1

BS2_EnrollUserEx

[+ 2.6.3]

[BS2_EnrollUserEx](#)

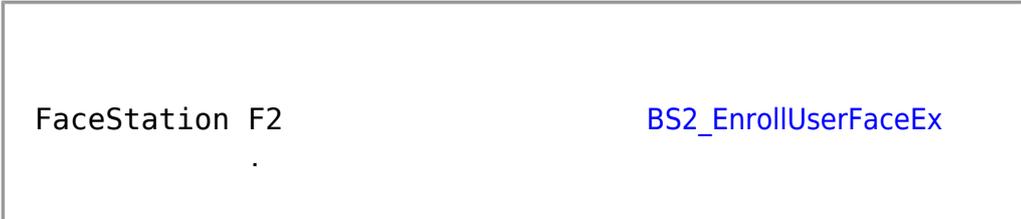

```
#include "BS_API.h"
```

```
int BS2_EnrollUserEx(void* context, uint32_t deviceId, BS2UserBlobEx*
userBlob, uint32_t userCount, uint8_t overwrite);
```

[BS2UserBlobEx](#)

- [In] *context* : Context
- [In] *deviceId* :
- [In] *userBlob* :
- [In] *userCount* :
- [In] *overwrite* :

BS_SDK_SUCCESS , 가

- [BS2_GetUserList](#)
- [BS2_RemoveUser](#)
- [BS2_RemoveAllUser](#)

[BS2_GetUserInfos](#)
[BS2_GetUserInfosEx](#)
[BS2_EnrollUser](#)
[BS2_EnrollUserEx](#)
[BS2_GetUserDatas](#)
[BS2_GetUserDatasEx](#)

From:

<https://kb.supremainc.com/bs2sdk/> - **BioStar Device SDK**

Permanent link:

https://kb.supremainc.com/bs2sdk/doku.php?id=ko:bs2_enrolluserex&rev=1603331125

Last update: **2020/10/22 10:45**