

BS2_RemoveAllAuthOperatorLevelEx 1

..... 1

..... 1

..... 1


..... 1

Device API > [BS2_RemoveAllAuthOperatorLevelEx](#)

BS2_RemoveAllAuthOperatorLevelEx

[+ 2.6.3]

[BS2_SetAuthConfig](#), [BS2_GetAuthConfig](#) , 1000 , 10 가

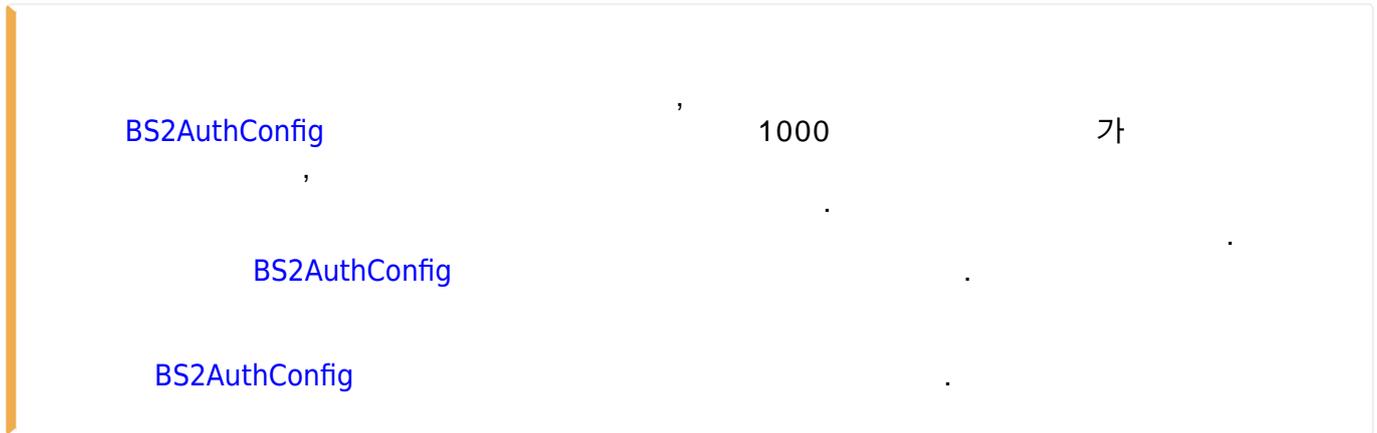

```
#include "BS_API.h"

int BS2_RemoveAllAuthOperatorLevelEx(void* context, BS2_DEVICE_ID deviceId);
```

- [In] *context* : Context
- [In] *deviceId* :

BS_SDK_SUCCESS , 가

- [BS2_GetAuthOperatorLevelEx](#)
- [BS2_GetAllAuthOperatorLevelEx](#)
- [BS2_SetAuthOperatorLevelEx](#)
- [BS2_RemoveAuthOperatorLevelEx](#)

[BS2_RemoveAllAuthOperatorLevelEx](#)

From:

<https://kb.supremainc.com/bs2sdk/> - **BioStar 2 Device SDK**

Permanent link:

https://kb.supremainc.com/bs2sdk/doku.php?id=ko:bs2_removeallauthoperatorlevelex

Last update: **2023/08/17 13:44**