Table of Contents

Possible Integration Option 3 : G-SDK	1
What is G-SDK?	
How G-SDK works?	
What is different from BioStar 2 Device SDK?	
What are the next features?	2
Summary of G-SDK	


Possible Integration Option 3 : G-SDK

In addition to the integration method using BioStar2 SW API or BioStar2 Device SDK, G-SDK is recently released as a new integration option for device management, user management, and log management.

What is G-SDK?

G-SDK is one of the integration options for communicating with BioStar 2 devices. It is a lightweight, scalable, and cross-platform solution which will expedite your development.

How G-SDK works?

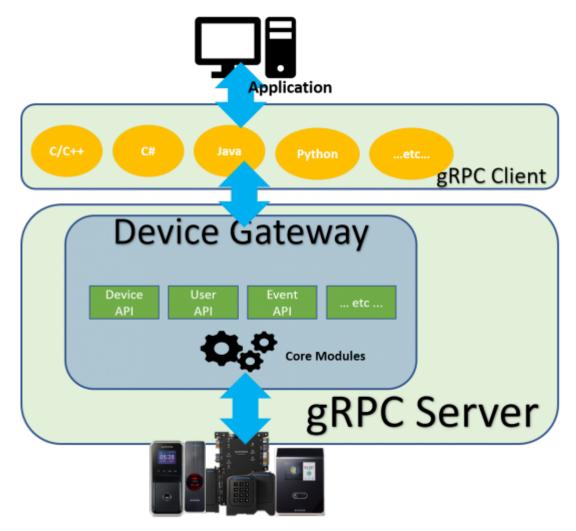

[Figure 1. G-SDK architecture]

G-SDK consists of Device Gateway in gRPC Server and gRPC Client Libraries. Based on gRPC, it supports many programming languages such as Java, C#, Python, Node.js, Go, etc.


⁻ http://kb.supremainc.com/knowledge/

(gRPC (gRPC Remote Procedure Calls) is an open source remote procedure call (RPC) system initially developed at Google in 2015.)

Multi-language support

- Language-neutral IDL
- Native client libraries

Device Gateway that communicates with BioStar 2 device can be run on a server or cloud. **Core modules** use BioStar 2 protocols and written by GO language.

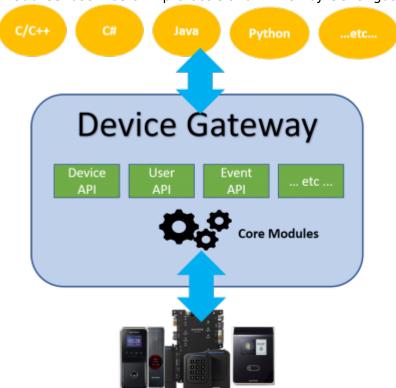

[Figure 2. Device Gateway Structure]

What is different from BioStar 2 Device SDK?

Existing BioStar 2 Device SDK provides C++ library with C#. G-SDK is released to provide flexible development for those who would like to meet the requirements below.

Let's take a look for an easy comparison between BioStar 2 Device SDK and G-SDK.

⁻ http://kb.supremainc.com/knowledge/

	BioStar 2 Device SDK	G-SDK
Deployment	Shared library	Client librariesDevice Gateway
Supported OS	WindowsX86 Linux	WindowsX86/Arm LinuxMac OS
Supported Language	• C++ • C# sample	 C++, Java, Python, Go, Ruby, C#, Node.js, Android Java, Objective-C, PHP, Web C#, Java, Python, GO, node samples

[Figure 3. BioStar 2 Device SDK vs G-SDK]

One of the biggest advantages of G-SDK compare to Device SDK is that it supports various languages. For the last years, Device SDK users have had difficulty using development language other than C++ or C# which is in the sample code.

Since BioStar 2 Device SDK can communicate with C++ library, you have to use C++ language or need to marshall all the APIs and structures in the library into other languages. Currently BioStar 2 Device SDK provides only C# marshalling sample.

This is a limitation of BioStar 2 Device SDK due to the structure.




[Figure 4. BioStar 2 Device SDK structure]

How G-SDK can support so many languages?

It is because G-SDK is based on gRPC. gRPC is an open RPC framework that supports many languages developed by Google.

Basically, the device gateway is the one that communicates with BioStar 2 device. Your client applications can connect to it using gRPC client libraries.

⁻ http://kb.supremainc.com/knowledge/

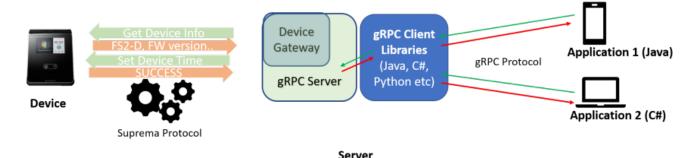

[Figure 5. G-SDK structure]

What are the next features?

1. Master Gateway

G-SDK can support up to 1000 device connections with a Device gateway.

Currently, Master gateway that will support up to 100,000 device connections is under development. Master Gateway helps you handle multiple Device gateways and it can be deployed on a cloud server or provide mobile direct accessibility too.

	Device Gateway	Master Gateway
Role	Manage devices	 Manage devices through gateways Manage gateways Provide additional services such as authentication, rate limit, user synchronization, etc.
Deployment	Single binary	Single binaryDocker
Target Applications	DesktopSingle site	 Mobile Cloud Multi sites
Max. Devices	• 1,000	• 100,000
Design Goals	PerformanceStability	ScalabilityExtensibility

[Figure 6. Device Gateway vs Master Gateway]

2. Advanced AC API

G-SDK doesn't support advanced AC such as Zone, Wiegand or RS485 but it supports only simple configurations & features.

In the future, G-SDK will support all the APIs that are supported in the BioStar 2 Device SDK : Zone, Wiegand, RS485, etc.

3. More language support samples

G-SDK provides C#, Java, Python, Go and Node samples. Furthermore, G-SDK is planning to support Android, iOS, Ruby samples.

⁻ http://kb.supremainc.com/knowledge/

Summary of G-SDK

Supported OS

Windows, x86/Arm Linux, Mac OS

Recommended Requirements

2.0GHz CPU, 4GB(32bit) or 8GB(64bit) RAM

Minimum Requirements

1.0GHz CPU, 1GB(32bit) or 2GB(64bit) RAM

Maximum number of devices

Up to 1,000

Supported Language

C++, Java, Python, Go, Ruby, C#, Node.js, Android Java, Objective-C, PHP, Web

Supported API

The basic AC APIs(Access control, User management, Event log etc) except advanced features such as Zone, Wiegand, RS485 features.

Supported Device

All BioStar 2 devices

Download

https://github.com/biostar-dev/g-sdk/releases

Manual

https://biostar-dev.github.io/g-sdk/

From:

http://kb.supremainc.com/knowledge/ -

Permanent link:

http://kb.supremainc.com/knowledge/doku.php?id=en:possible_integration_options_3_in_biostar_2

Last update: 2025/08/20 10:03