


Server API 1
..... 1
OnUserPhrase 2
OnBarcodeScanned 2
OnOsdpStandardDeviceStatusChanged 2

Server API

, BioStar

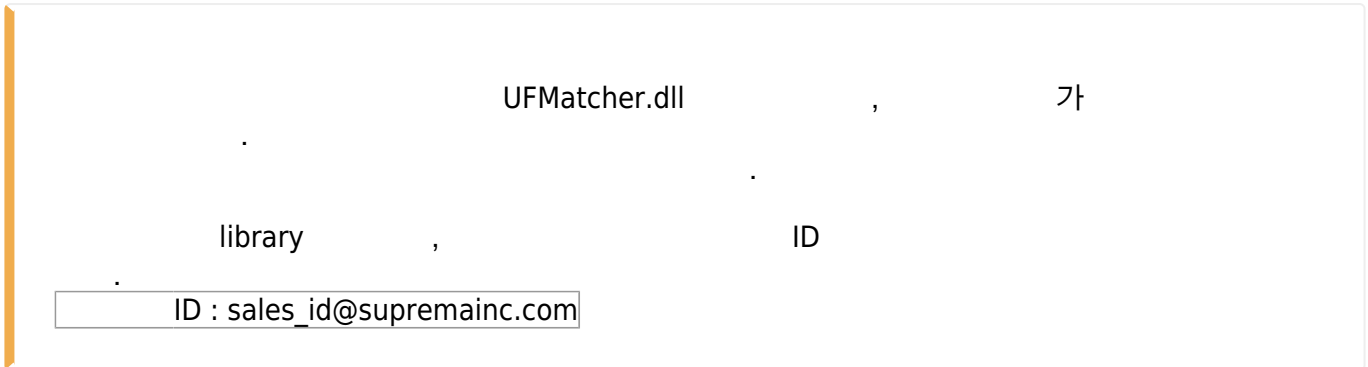

- [BS2_SetServerMatchingHandler](#):
- [BS2_VerifyUser](#): User ID
- [BS2_IdentifyUser](#):
- [BS2_VerifyUserEx](#): [+ 2.4.0] User ID
- [BS2_IdentifyUserEx](#): [+ 2.4.0]
- [BS2_VerifyUserSmall](#): [+ 2.6.3] User ID
- [BS2_IdentifyUserSmall](#): [+ 2.6.3]
- [BS2_VerifyUserSmallEx](#): [+ 2.6.3] User ID
- [BS2_IdentifyUserSmallEx](#): [+ 2.6.3]
- [BS2_VerifyUserFaceEx](#): [+ 2.7.2] User ID
- [BS2_SetUserPhraseHandler](#): [+ 2.7.0]
- [BS2_ResponseUserPhrase](#): [+ 2.7.0]
- [BS2_SetBarcodeScanListener](#): [+ 2.8.2] Barcode listener
- [BS2_SetOsdpStandardDeviceStatusListener](#): [+ 2.9.1] OSDP listener

```
typedef void (*OnVerifyUser)(uint32_t deviceId, uint16_t seq, uint8_t isCard, uint8_t cardType, const uint8_t* data, uint32_t dataLen);
typedef void (*OnIdentifyUser)(uint32_t deviceId, uint16_t seq, uint8_t format, const uint8_t* templateData, uint32_t templateSize);
```

1. *OnVerifyUser*
Card , User ID가 BioStar

2. *OnIdentifyUser*
BioStar

OnUserPhrase

```
typedef void (*OnUserPhrase)(uint32_t deviceId, uint16_t seq, const char*
userID);
```

1. *deviceId*

2. *seq*

3. *userID*
ID

OnBarcodeScanned

barcode가 scan

```
typedef void (*OnBarcodeScanned)(uint32_t deviceId, const char* barcode);
```

1. *deviceId*
barcode ID

2. *barcode*
barcode

OnOsdpStandardDeviceStatusChanged

OSDP 가

```
typedef void (*OnOsdpStandardDeviceStatusChanged)(uint32_t deviceId, const
BS20sdpStandardDeviceNotify* notifyData);
```

1. *deviceId*
OSDP

2. *notifyData*
OSDP

From:

<https://kb.supremainc.com/kbtest/> - **BioStar 2 Device SDK**

Permanent link:

https://kb.supremainc.com/kbtest/doku.php?id=ko:server_api

Last update: **2023/08/17 13:40**